





I. Rinne / Channel:



light NW100 mini 55



light NW100

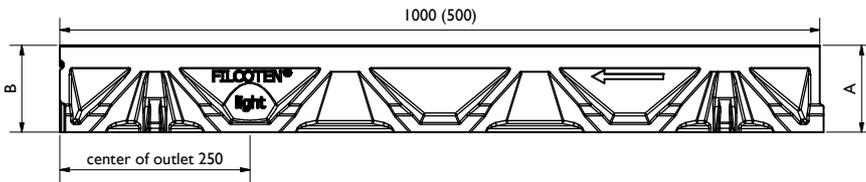

light NW100, Nr. 5-0 f. seitl. Bohrung/f. side outlet drilling

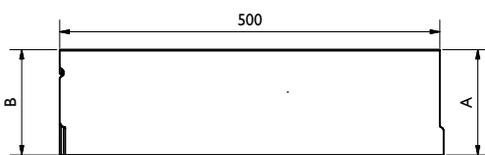


Rinne / channel - Maße / dimensions [mm]				
Typ	Höhe A height A	Höhe B height B	Länge length	BG code
mini 55	55	55	1000	10110000
0	115	115	1000	10311000
0 (0,5m)	115	115	500	10311050
1	115	120	1000	10311001
2	120	125	1000	10311002
3	125	130	1000	10311003
4	130	135	1000	10311004
5	135	140	1000	10311005
5-0	140	140	1000	10311061
5-0 (0,5m)	140	140	500	10311051
6	140	145	1000	10311006
7	145	150	1000	10311007
8	150	155	1000	10311008
9	155	160	1000	10311009
10	160	165	1000	10311010
10-0	165	165	1000	10311062

Legende / explanation:	
V:	verzinkter Stahl / galvanized steel
E:	Edelstahl / stainless steel
G:	Gußeisen / ductil iron
H:	Holz / wood


2. Stegrost / Slotted grating:

A15kN: SW8/80 V 17010200 (17010201), SW5/80 E 17010300 (17010301)

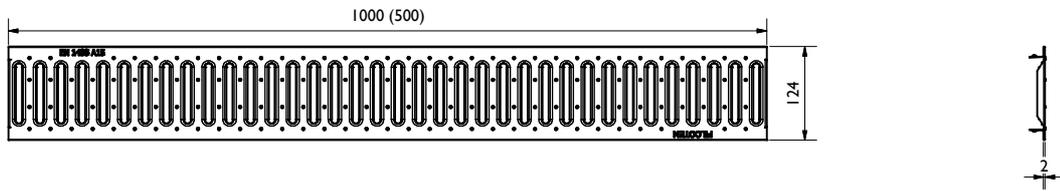


2. Gitterrost / Mesh grating:

BI25kN MW30/10: V 17010210 (17010211), E 17010310 (17010311)

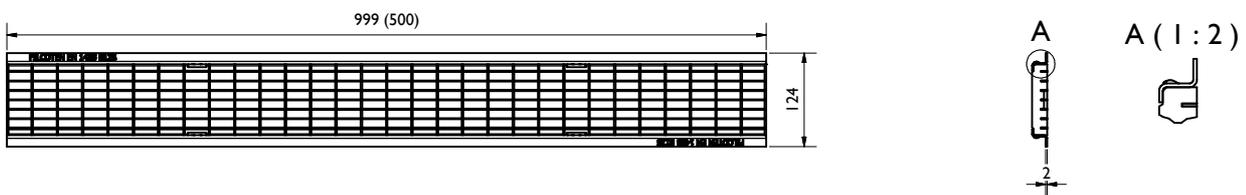

2. Gußrost / Ductil iron grating:

C250kN MW15/25: GJS 17010100,  
KTL-beschichtet / KTL-coated 17010150


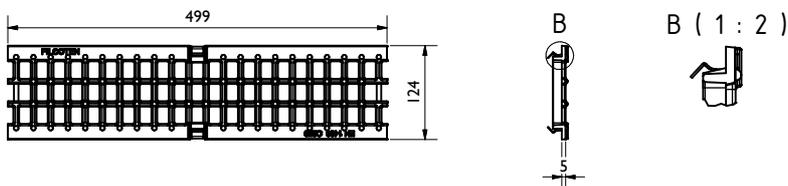


data sheet:



FILCOTEN light NW100

2. Schlitzaufsatz / Slot top:

C250kN SW12,5: V 17110243 (17110244), E 17110343 (17110344)


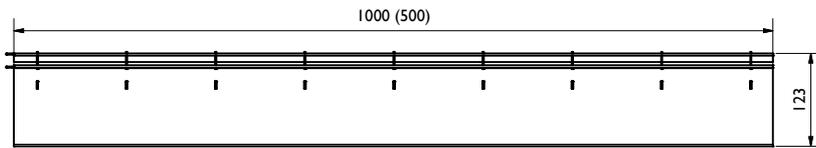


C250kN SW18: V 17110233 (17110234), E 17110333 (17110334)


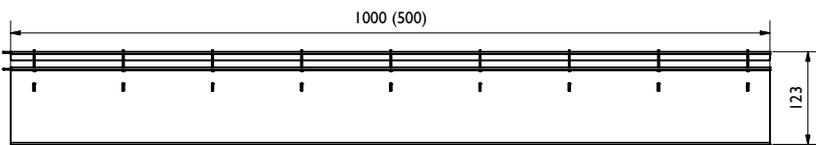


2. Revisionschacht / Maintenance unit:

C250kN SW12,5: V 17110281, E 17110381


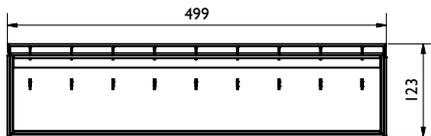


C250kN SW18: V 17110295, E 17110395

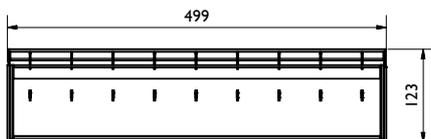

2. Slotzeinlage / Slot inlay square-perf. 8/8:



V 37951 (37950), E 37956 (37955)

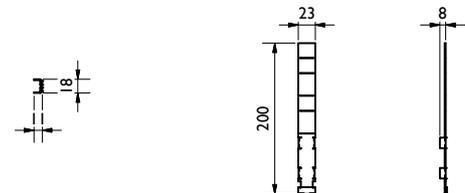

4. Stirnplatte/End cap:  
V 17110280, E 17110380

2. Bauzeitabdeckung / Construction time barrier SW 18:



H 37961







2. Schlitzaufsatz / Slot top:

BI25kN SW12,5: V 17110237 (17110238), E 17110337 (17110338)

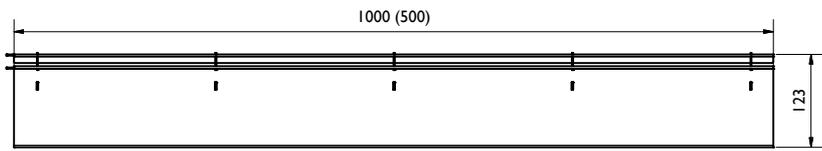

2. Revisionschacht / Maintenance unit:

BI25kN SW12,5: V 17110297, E 17110397

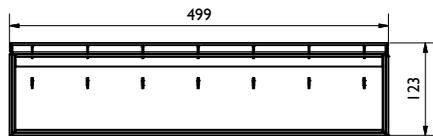


data sheet:

FILCOTEN light NW100

3. Sinkkasten / Sump unit:


(optional: Geruchsverschluss / Drain trap: 30056  
Schlammeimer / Silt bucket: 22515)

V 10310093

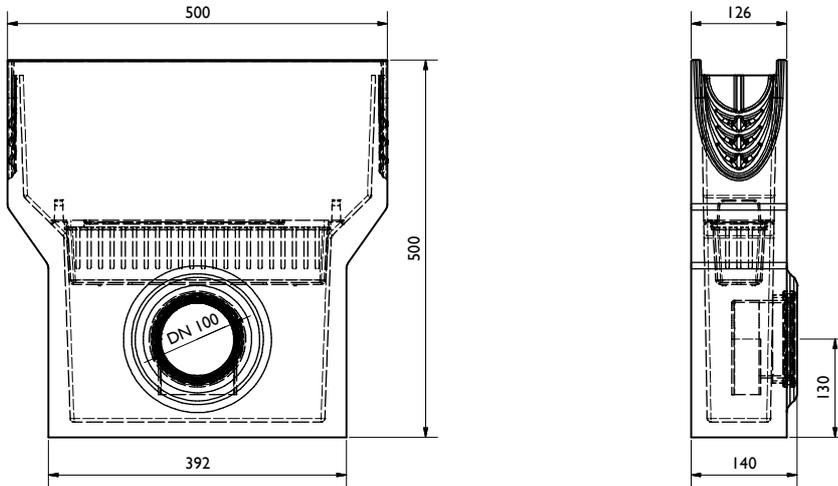


4. Stirn-/ Endplatte  
/ End cap:


V 19010230, E 19010330




V 19010232, E 19010332



mini: V 19010200, E 19010300



5. Geruchsverschluss für Bodenablauf  
/ Drain trap for bottom outlet:  
PVC 30019




6. Halteklammer / Fixing clip:

Gussmaschenrost/ ductil iron mesh grating  
32068



6. Patentklammer / Locking clip:

Gitterrost/ Mesh grating  
32080



Gussmaschenrost/ ductil iron mesh grating  
32067

