




75mm  
Gulley Spigot  
Code 75/GOS  
(Front elevation)

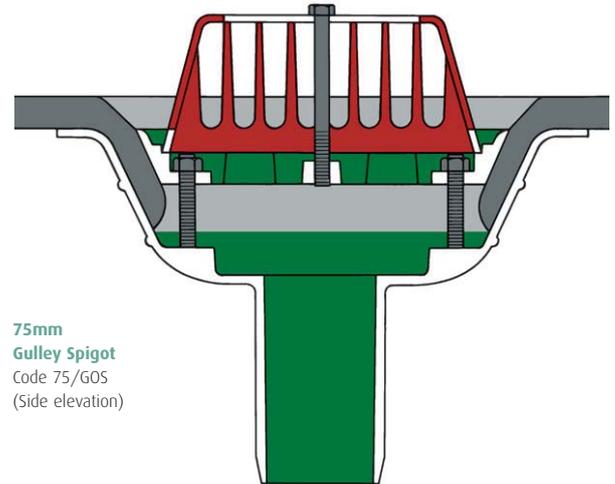

75mm  
Gulley Spigot  
Code 75/GOS  
(Side elevation)

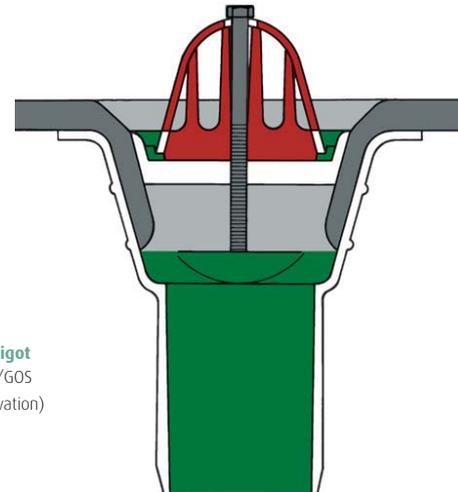

100mm  
Gulley Spigot  
Code 100/GOS  
(Front elevation)

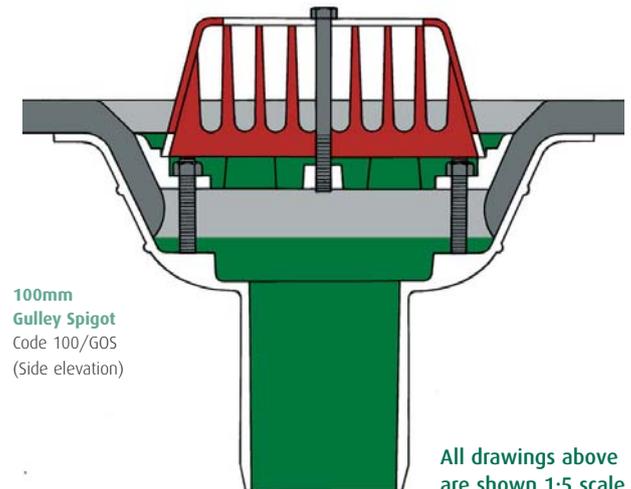

100mm  
Gulley Spigot  
Code 100/GOS  
(Side elevation)


All drawings above are shown 1:5 scale

**Caroflow** Gulley outlets are designed for use in narrow width drainage channels, within which larger outlets would not be suitable. Available in either LM6 Aluminium Silicon casting alloy to BS1490:1970 for most roof finishes or in leaded gunmetal to BS1400:1985 for use with lead or copper-clad roofs or for connection to copper pipework.

**Performance and Connections** see page 19.

Suitable for connection to:

- PVC ● Aluminium ● Cast Iron
- Copper (Gunmetal only)

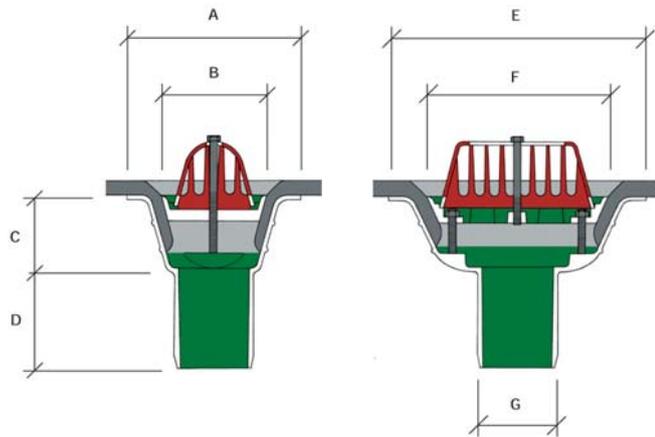

Order Code No.	75/GOS	100/GOS
Pipe size (nom)	75	100
A	238	238
B	144	144
C	105	105
D	125	125
E	344	344
F	240	240
G	83	110

**Example specification**

100mm nominal bore **CAROFLOW** Gulley Outlet with spigot connection in aluminium (or leaded gunmetal) with domical grating Code 100/GOS

Gutter Centre Tel: 0330 2231731 Email:sales@guttercentre.co.uk