



# Modulock Raised Deck Supports - Uni-Ring and Uni-Plus

Uni-Ring and Uni-Plus are versatile and economic paving supports. Uni-Ring supports provide a 16mm deck void and can be stacked in combination with 3mm Uni-Shims for additional height correction. Uni-Plus is a low level height adjustable system providing 25mm to 40mm of adjustment.

## Uni-Ring

Harmer Uni-Ring is quick and easy to install, and provides fast, efficient drainage through the open joints of the slabs to the concealed drainage below. The system is ideal for any waterproofed substructure and especially for inverted roof constructions where ballasted insulation is laid onto the waterproofing layer of the flat roof. Traditional bedding and grouting materials are not required, and once installed, the paving slabs can be easily lifted for simple inspection of the drainage outlets and for substructure maintenance.

- Ring with collapsible spacers
- Height adjustment shims
- A maximum of two Uni-Shims can be used per Uni-Ring

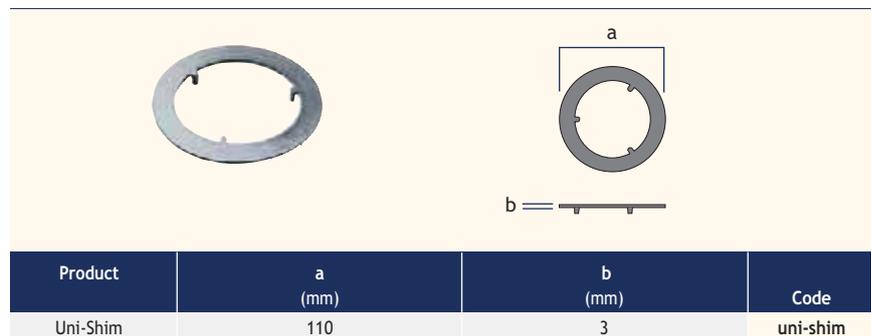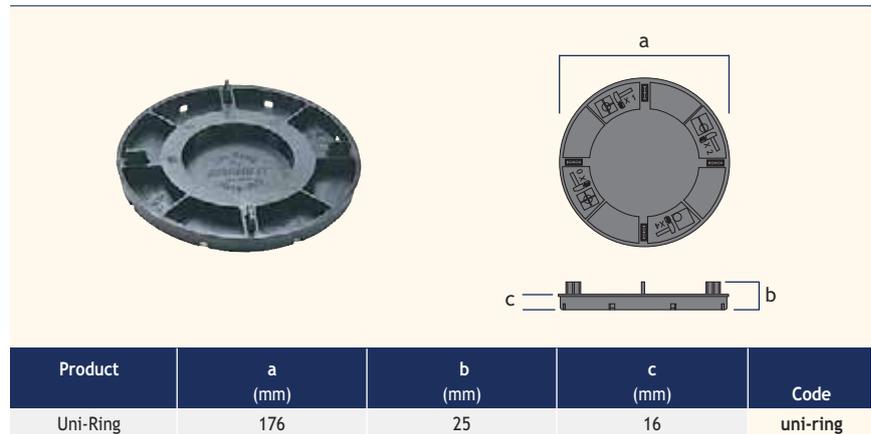

## Uni-Plus

Harmer Uni-Plus is an economical low level height adjustable system that is adjusted on a screw mechanism to provide height adjustments of 25mm to 40mm. The head features collapsible spacers for ease of installation in corners and perimeter wall situations. Uni-Plus is suitable for use where the floating deck is to be laid parallel to the roof deck i.e. does not have any slope correcting features.

