

Gutters & fittings


Gutters

R – Half Round Gutter. Standard length 3m



Size mm	D mm	d mm
100	107	17
125	123	17
150	155	17
190	192	22

- Roll formed 0.6mm steel with bead stiffened fronts
- Can be joined using RSK gutter joint or roll joint method
- Supplied in 3m lengths as standard
- Also available in 2m or 1m shorter lengths




Gutter joints

Used to join gutters or gutter angles


RSK – Gutter Joint with Rubber Seal




- Designed with click and lock mechanism for easy installation
- Built in EPDM rubber gasket
- Doesn't require sealant or screws
- 190mm gutters are fitted using the roll joint method

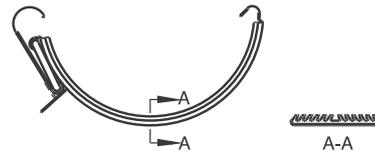

RER – Rectangular Gutter



- 0.6mm steel box gutter with front lip detail
- Joined using RERSK gutter joint
- Supplied in 3m lengths as standard




RERSK – Rectangular Gutter Joint with Rubber Seal



Guidance document available on request

- For use with rectangular gutters
- Includes central marks to aid with gutter positioning
- Built in EPDM rubber gasket
- Doesn't require sealant or screws




Stopends

Required for each end of a gutter run


RG – Self-Locking Stop End




- Universal left and right handed, surplus ear should be removed
- Push fits around the outside of the gutter
- Built in EPDM rubber seal, doesn't require sealant or screws

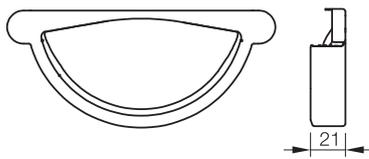

RERGV/RERGH – Left/Right Hand Rectangular Stop Ends

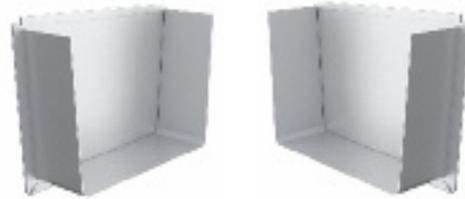


- For use with rectangular gutters
- RERGV fits to left hand end only, RERGH fits to right hand end only
- Sits inside gutter end
- It is recommended that sealant is used



RGV/RGH – Left/Right Hand Stop Ends



- Required for 190mm gutters
- RGV fits to left hand end only, RGH fits to right hand end only
- Sits inside gutter end, fitted using roll joint method
- It is recommended that sealant is used

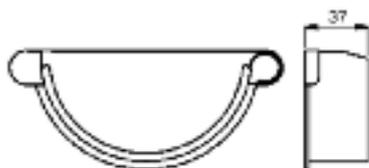

Gutters & fittings

Gutter angles

Used to continue gutter line around a corner


- **Universal left and right handed**
- **Require 2 RSK gutter joints**

RVI 90° – Internal Gutter Angle



Size mm	L mm
100	400
125	300
150	300
190	500

- Required for roof features such as recesses or extensions
- To fit 90° corners
- Alternative angles can be manufactured on request



RVI 135° – Internal Gutter Angle



Size mm	L mm
100	300
125	300
150	300

- Required for roof features such as recesses or extensions
- To fit 135° corners
- Alternative angles can be manufactured on request




RVY 90° – External Gutter Angle



Size mm	L mm
100	295
125	160
150	130
190	285

- Required for roof types such as hipped or cross-gable
- To fit 90° corners
- Alternative angles can be manufactured on request




RVY 135° – External Gutter Angle



Size mm	L mm
100	250
125	240
150	230

- Required for roof types such as hipped or cross-gable
- To fit 135° corners
- Alternative angles can be manufactured on request




RERVI 90° – Internal Rectangular Gutter Angle




Size mm	L mm
136	300

- For use with rectangular gutters
- Required for roof features such as recesses or extensions
- Also available to fit 135° corners




RERVY 90° – External Rectangular Gutter Angle



Size mm	L mm
136	165

- For use with rectangular gutters
- Required for roof types such as hipped or cross-gable
- Also available to fit 135° corners



Gutter outlets


Used to connect gutters to downpipes

OMV – Gutter Outlet



Size mm	D mm	d mm	A mm	H mm
100x75	100	75	151	56
100x87	100	87	151	48
125x75	125	75	174	67
125x87	125	87	174	59
125x100	125	100	174	50
150x87	150	87	207	82
150x100	150	100	207	73
150x120	150	120	207	60

- Can be positioned at any point along the length of the gutter
- Click fit for easy installation
- Requires hole to be created in the gutter

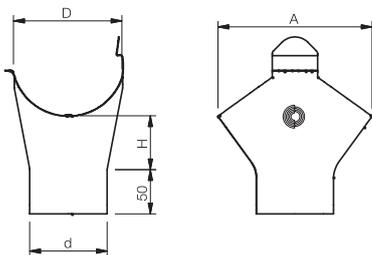

OK – Gutter Outlet



- For 190mm gutters or to fit 75mm pipes to 150mm gutters
- Can be positioned at any point along the length of the gutter
- Uses flex-fit flaps to secure
- Requires hole to be created in the gutter


Gutters & fittings

REOK – Rectangular Nozzle



Size mm	D mm	d mm	H mm
136x75	136	75	85
136x87	136	87	85
136x100	136	100	85

- For use with rectangular gutters
- Can be positioned at any point along the length of the gutter
- Uses flex-fit flaps to secure
- Requires hole to be created in the gutter



Fascia brackets


Used for securing gutters by fixing to fascia boards

- **Recommended maximum 800mm interval spacing**
- **Should be installed to create fall of 10mm per 3.0m run**

KFK – Fascia Bracket




- Most popular fascia bracket for UK installations
- Solid 5mm steel structure
- 1 standard screw hole and 1 oval hole

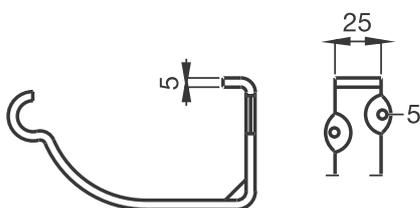

KPK – Lightweight Fascia Bracket



- Folded steel lightweight design
- Reduced metal content
- More environmentally friendly
- 4 oval fixing holes to allow precise fixing adjustments

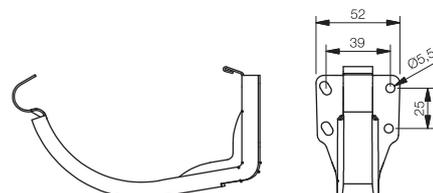


K24 – 240mm Flex-Fit Fascia Bracket



Size mm	L mm
190	244


- Extended 240mm bracket for larger gutters
- Uses flexible clips to hold the gutter in place
- 4 screw holes offer more secure fixing



SSK – Adjustable Fascia Bracket



- For use on angled fascia boards
- Locks in place at 7°, 14°, 18°, 22°, 27°, 38° or 45° angle
- Now with fixed hook front
- Requires 1 fixing screw per bracket

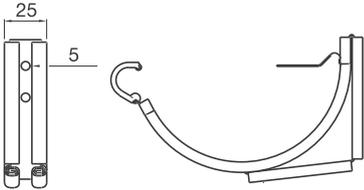


K07 – 70mm Flex-Fit Fascia Bracket



Size mm	L mm
100	70
125	70
150	70
190	70

- 70mm bracket with 2 screw holes
- Uses flexible clips to hold the gutter in place
- Clips attached with stainless steel rivets




REK07 – Rectangular 70mm Flex-Fit Fascia Bracket



Size mm	L mm
136	70

- For use with rectangular gutter
- 70mm bracket with 2 screw holes
- Uses flexible clips to hold the gutter in place
- Clips attached with stainless steel rivets



Gutters & fittings

Rafter brackets

Used for securing gutters by fixing to roof rafters


- **Recommended maximum 800mm interval spacing**
- **Should be installed to create fall of 10mm per 3.0m run**
- **Should be bent to required angle using KBO bracket bender**

KFL – 200mm Rafter Bracket



Size mm	L mm
100	196
125	196
150	196

- Most popular bracket for UK installations
- Solid 5mm steel, 25mm wide rafter bar with 4 fixing holes
- Can be supplied bent or twisted for side fixing for additional charge





KFM – 150mm Rafter Bracket



Size mm	L mm
125	146
150	146

- Shorter rafter bar is preferred for refurbishment installations
- Solid 5mm steel, 25mm wide rafter bar with 4 fixing holes
- Can be supplied bent or twisted for side fixing for additional charge




KFL35 – 350mm Rafter Bracket



Size mm	L mm
125	336
150	336

- Longer rafter bar can provide more secure fixing
- Solid 5mm steel, 25mm wide rafter bar with 4 fixing holes
- Can be supplied bent or twisted for side fixing for additional charge



Flex-fit rafter brackets

Used for securing gutters by fixing to roof rafters


- **Recommended maximum 800mm interval spacing**
- **Should be installed to create fall of 10mm per 3.0m run**
- **Should be bent to required angle using KBO bracket bender**

K16 – 160mm Flex-Fit Rafter Bracket



Size mm	L mm
100	160
125	160
150	160

- Uses flexible clips, attached with stainless steel rivets, to hold the gutter in place
- Solid 5mm, steel 25mm wide rafter bar with 4 fixing holes
- Can be supplied bent or twisted for side fixing for additional charge




K21 – 210mm Flex-Fit Rafter Bracket



Size mm	L mm
125	210
150	210

- Uses flexible clips, attached with stainless steel rivets, to hold the gutter in place
- Solid 5mm, steel 25mm wide rafter bar with 4 fixing holes
- Can be supplied bent or twisted for side fixing for additional charge




K33 – 330mm Flex-Fit Rafter Bracket



Size mm	L mm
150	334
190	334

- Uses flexible clips, attached with stainless steel rivets, to hold the gutter in place
- Solid 6mm, steel 30mm wide rafter bar with 4 fixing holes
- Can be supplied bent or twisted for side fixing for additional charge




Gutters & fittings

REK21 – Rectangular 210mm Flex-Fit Rafter Bracket



Size mm	L mm
136	210

- Uses flexible clips to hold the gutter in place
- Clips attached with stainless steel rivets
- Solid 5mm, steel 25mm wide rafter bar with 4 fixing holes



Radius gutter brackets


Used for fixing gutter sections to fit a curved roofline

RSKR- Radius Gutter Bracket



Guidance document available on request

- Combined gutter joint and fascia bracket
- 4° alignment deviation tolerance at each joint
- Requires 2 fixing screws per bracket
- Built in EPDM rubber gasket

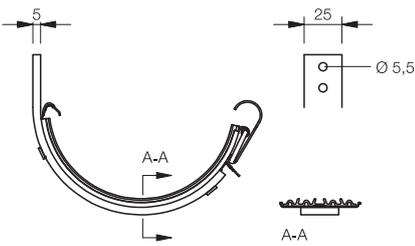

Rise & fall brackets

Used for securing gutters by driving into the wall

- **Recommended maximum 800mm interval spacing**
- **Should be installed to create fall of 10mm per 3.0m run**

RFKF – Rise & Fall Bracket



- Solid 5mm steel bracket with fixing nut
- 250mm threaded bar used to adjust gutter level
- 300mm spike used for drive in fixing to wall
- Threaded bar and spike require paint after installation




Gutter accessories

STAG – Stay Strap




- Used to provide added stability to gutters in areas subject to adverse weather conditions
- Clips to rolled front of gutter
- 5 fixing holes to secure to the roof

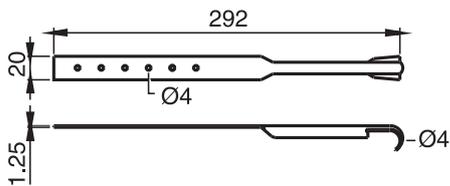

OSKR – Straight Overflow Protector




- Used to reduce gutter overflow at high flow sections
- Can be retro-fitted to gutter
- Hooks over gutter bead to secure
- Hooks attached with stainless steel rivets

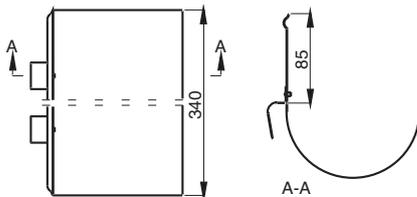

OSK – Corner Overflow Protector



- Used to reduce gutter overflow at high flow corner sections
- Can be retro-fitted to gutter
- Hooks over gutter bead to secure
- Hooks attached with stainless steel rivets

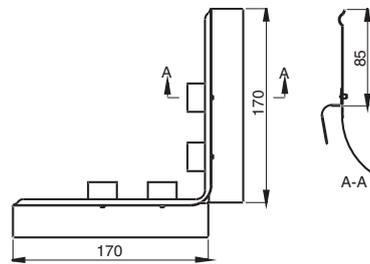

LGB – Leafline Gutter Brush



- Used to catch leaves whilst allowing water to flow
- Supplied in 3m lengths
- No fastenings are required, cable ties may be preferred in high wind areas
- Stainless steel wire core with polypropylene bristles.

GRID – Gutter Leaf Guard (HD Polythene)



- Used to create a cover to prevent leaf blockage
- Supplied in 10m roll with 23 clips
- Clips are available in Black or White
- Additional clips can be purchased