

# T-Trim key features

- 1 Hides untidy roof details
- 2 Mill finish
- 3 13 standard profiles
- 4 Preformed corners available



# T-Trim profiles and corners



## Performance











Due to T-Trim's aluminium composition it will not rust and is not affected by atmospheric pollution.

Anodised or polyester powder coated profiles are colourfast and once installed are maintenance free.

T-Trim is unaffected by the temperatures of hot mastic and liquid bitumen.






## 'AF' Profiles

→ for built up felt roofing systems



## 'AA' Profiles

→ For mastic asphalt roofing systems

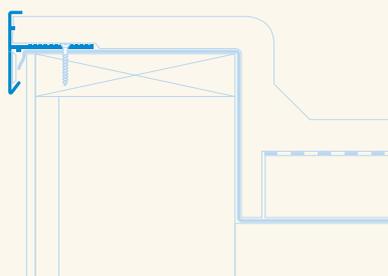

## Finishes


All profiles are available from stock in mill finish.

They are also available to special order powder coated or anodised to any RAL colour number.




## T-Trim corners

Available from stock.

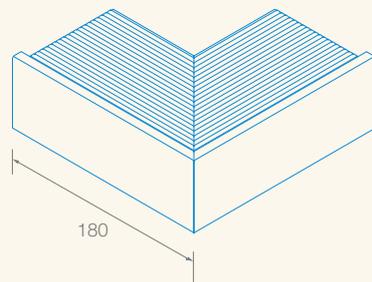

External corner

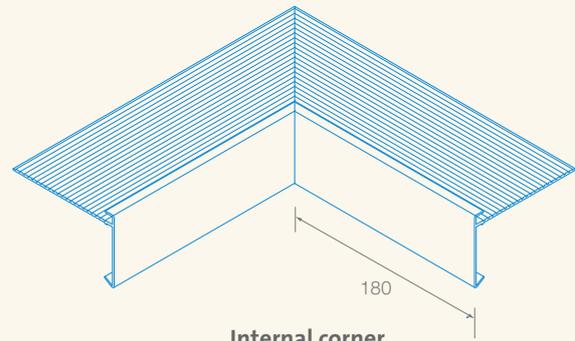

Internal corner



## Bespoke folded aluminium profiles are also available, for example:

- Twice bent roof edge trim
- Parapet wall capping profiles
- Many other bespoke items

## Bespoke corners

Available to special order, to suit specific requirements. For example, manufactured to any specific length or angle.

# T-Trim supply & installation



## Supply

Em-Trim is supplied in 3m lengths, complete with all necessary connectors.

## Sitework


All drilling and cutting can be carried out on site using traditional tools.

T-Trims should be fixed over the first layer of a built-up roofing system or the sheathing felt when asphalt is used. Typical details are shown on the illustrations below.


T-Trims should be fixed at maximum 300mm centres, using suitable fixings. A comprehensive range of fixings and drill bits is available from stock (refer to page 35 for details on fixings).

All lengths should be close butt jointed, using the connecting pieces supplied.


## Asphalt finish on timber deck

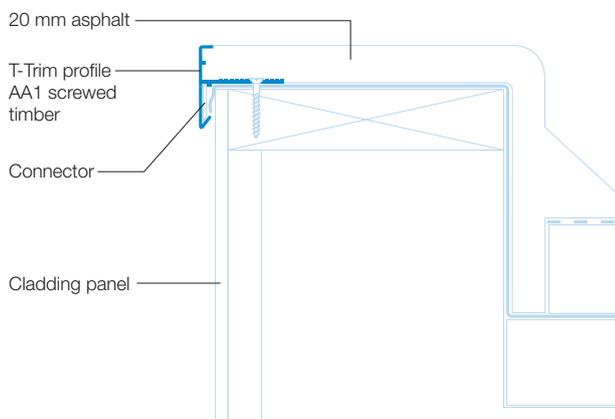

## Felt finish on concrete deck

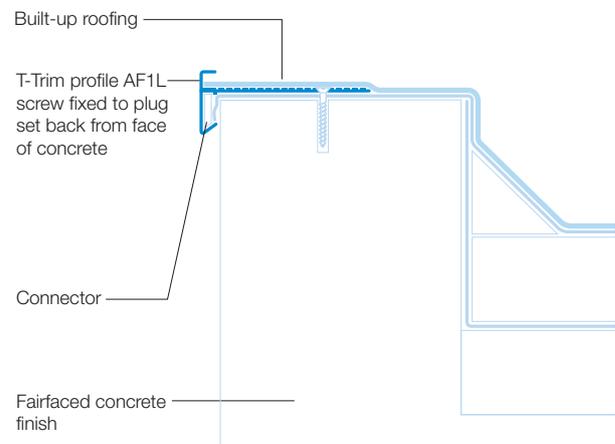

## Felt finish on plywood deck

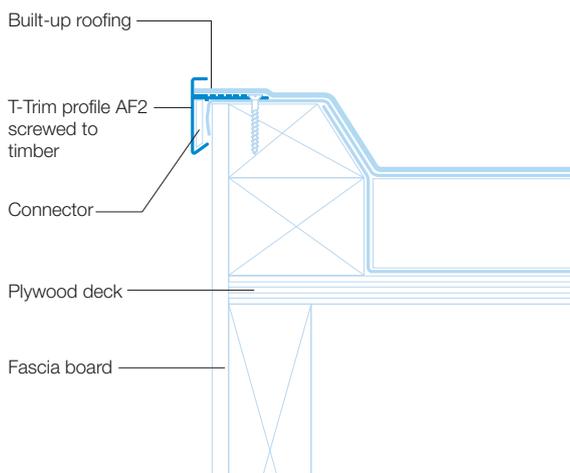



**Case study** Kellands Primary School  
**Project type** Refurbishment  
**Product** T-Trim AF5  
**Material** Aluminium  
**Quantity** 360 linear metres  
**Colour** Mill finished