



## Rainline**Vandal**

Reinforced roof drainage system  
Downpipes and outlets for public areas

Available from the Gutter Centre Tel: 0330 2231731

# Lindab Vandal-Proof Rainline

Lindab introduces a series of reinforced downpipes and outlets for public areas. The reinforced downpipes are available in six different designs to meet most needs. They are made of 2 mm hot-dip galvanised steel or 1.5 mm stainless steel plate. Choose from coated, stainless or galvanised finishes. Brackets and leaf filters are always made of stainless steel. The reinforced pipes connect to the downpipes with a drain shoe (BUTK).

## Design

The downpipes are available in the following colours and finishes.


Antique white RAL 9002	Silver metallic RAL 9006	Anthracite metallic RAL 9007	Dark grey RAL 7011	Pine green RAL 6020
Tile red RAL 8004	Dark red RAL 3009	Copper metallic RAL 8003	Brown RAL 8017	Coffee brown RAL 8019
Black RAL 9005	Galvanised steel	Stainless steel		

	Steel	Stainless
Galvanised	•	
Coated	•	
Electropolished		•

### Vandal 300 SLS

300 mm reinforced downpipe with self-cleaning leaf filter.


	Steel	Stainless
Outer dim. (Ø mm)	102	102
Thickness	2.0	1.5
Weight (kg)	2.1	1.8

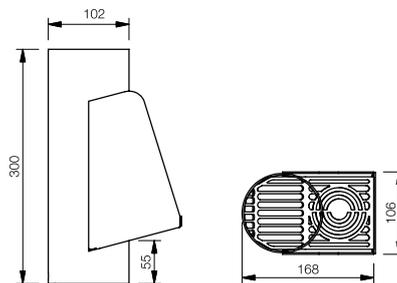

### Vandal 850 SLS

830 mm reinforced downpipe with self-cleaning leaf filter for buildings with plinth.


	Steel	Stainless
Outer dim. (Ø mm)	102	102
Thickness	2.0	1.5
Weight (kg)	5.3	4.1



### Vandal 850 UTK

850 mm reinforced downpipe with shoe.


	Steel	Stainless
Outer dim. (Ø mm)	102	102
Thickness	2.0	1.5
Weight (kg)	5.3	4.0



### Vandal 2000 SLS

2 m reinforced downpipe with self-cleaning leaf filter at the bottom.


	Steel	Stainless
Outer dim. (Ø mm)	102	102
Thickness	2.0	1.5
Weight (kg)	10.9	8.5



### Vandal 2000 SLST

2 m reinforced downpipe with self-cleaning leaf filter on top. Excellent for use in nursery and primary school environments.


	Steel	Stainless
Outer dim. (Ø mm)	102	102
Thickness	2.0	1.5
Weight (kg)	10.9	8.5



### Vandal 2000 UTK

2 m reinforced downpipe with shoe.


	Steel	Stainless
Outer dim. (Ø mm)	102	102
Thickness	2.0	1.5
Weight (kg)	11.8	8.0



### Drain shoe BUTK\*

Use for connection of all reinforced downpipes above.

Dim.	D1 mm	D2 mm	Dim.	D1 mm	D2 mm
75	81	115	111	93	119
87	93	115	120	93	119
100	93	115			




### One-piece bend SOKN\*

One-piece bend used when there are 100 mm or less facade shifts laterally between the reinforced downpipe and the drain shoe.

Dim. D/d

75
87
100



\*This is a standard Rainline product, it is not reinforced. Not available in Stainless Steel.



**At Lindab** we simplify construction for our customers. We do that by designing easy to use products and solutions, as well as offering efficient availability and logistics. We are also working on ways to reduce our impact on our environment and climate. We do that by developing methods to produce our solutions using a minimum of energy and natural resources, and by reducing negative effects on the environment. We use steel in our products. It's one of few materials that can be recycled an infinite number of times without losing any of its properties. That means less carbon emissions in nature and less energy wasted.

**We simplify construction**

**Lindab Ltd  
Building Products Division**

Profile House  
Shenstone Trading Estate  
Bromsgrove Road  
Halesowen  
West Midlands  
B63 3XB

Tel: 0121 585 2780  
Fax: 0121 585 2782  
Email: [rainline@lindab.co.uk](mailto:rainline@lindab.co.uk)  
Web: [www.lindab.co.uk/rainline](http://www.lindab.co.uk/rainline)



© 2015 Lindab AB. ©Lindab is a registered trademark of Lindab AB, as are the designation of our product ranges. Lindab AB reserves the right to make alterations without prior notice.

Whilst every care has been taken in the preparation of this brochure, some changes may have occurred since publication. Lindab AB is not responsible for omissions or typographical errors.

