

PRODUCT DATASHEET

# RPS Stackable Paving Support Pads


RPS support pads provide an economic solution to supporting paving at fixed height intervals.

More suited to totally flat surfaces, these supports can be stacked up to 6 high, and the 3mm shim (RPS-3) can be used for finer height adjustment.

The stackable supports are available in 10mm (RPS-10) or 15mm (RPS-15).



RPS Stacked

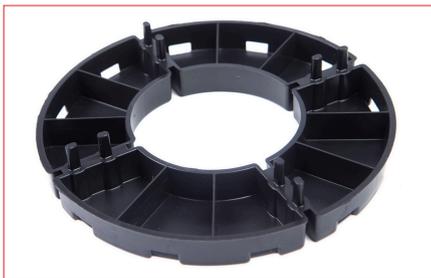

RPS15 - 15mm



RPS10 - 10mm



RPS3 - 3mm

## TECHNICAL SPECIFICATION

Material	PP Polypropylene (recyclable), UV resistant
Biological/chemical	Resistant to moulds, algae, alkali, bitumen
Height Range	3 - 51mm
Compression	300kg uniformly distributed load
Diameter	150mm
Spacer tab thicknesses	3mm
Working temperature	-40°C to 120°C



0330 223 1731  
[sales@guttercentre.co.uk](mailto:sales@guttercentre.co.uk)  
[www.guttercentre.co.uk](http://www.guttercentre.co.uk)