


Fascia type A




Fascia A – 3m

30mm Return, 50°

| Code | A |
|--------|-------|
| FA1120 | 120mm |
| FA1165 | 165mm |
| FA1200 | 200mm |
| FA1250 | 250mm |
| FA1325 | 325mm |
| FA1450 | 450mm |


Non standard sizes available on request ^①



H-Section joint trim

| Code | A | B |
|------|-------|------|
| FA21 | 300mm | 31mm |
| FA22 | 500mm | 31mm |


Site cut as required



H-section corner joint trim 90°

| Code | | A | B |
|------|----------|-------|------|
| FA61 | External | 300mm | 31mm |
| FA62 | External | 500mm | 31mm |
| FA71 | Internal | 300mm | 31mm |
| FA72 | Internal | 500mm | 31mm |


Site cut as required



Universal angle cover trim

| Code | A | B |
|------|--------|------|
| FA30 | 1000mm | 31mm |

Site cut and bend as required. Install using a rubber roller or equivalent




Gable box end

| Code | A | B |
|------|-------|-------|
| FA51 | 350mm | 450mm |
| FA52 | 350mm | 600mm |
| FA53 | 650mm | 600mm |

Site cut as required

Fascia type B



Fascia B – 3m

30mm Return, 90°

| Code | A |
|--------|-------|
| FB1150 | 150mm |
| FB1175 | 175mm |
| FB1210 | 210mm |
| FB1260 | 260mm |
| FB1335 | 335mm |
| FB1460 | 460mm |


Non standard sizes available on request ^①



H-Section joint trim

| Code | A | B |
|------|-------|------|
| FB21 | 300mm | 31mm |
| FB22 | 500mm | 31mm |

Site cut as required

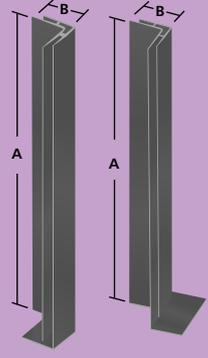

H-section corner joint trim 90°

| Code | | A | B |
|------|----------|-------|------|
| FB61 | External | 300mm | 31mm |
| FB62 | External | 500mm | 31mm |
| FB71 | Internal | 300mm | 31mm |
| FB72 | Internal | 500mm | 31mm |


Site cut as required



Universal angle cover trim

| Code | A | B |
|------|--------|------|
| FB30 | 1000mm | 31mm |

Site cut as required




Gable box end

| Code | A | B |
|------|-------|-------|
| FB51 | 350mm | 450mm |
| FB52 | 350mm | 600mm |
| FB53 | 650mm | 600mm |

Site cut as required

All dimensions are in mm, unless otherwise stated. ^① Please call Alutec for a quote.


Fascia type C

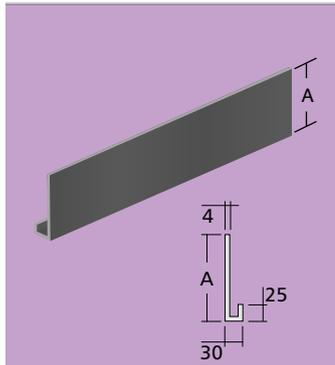

Fascia C – 3m 30x25mm Return

| Code | A |
|--------|-------|
| FC1150 | 150mm |
| FC1185 | 185mm |
| FC1235 | 235mm |
| FC1310 | 310mm |
| FC1435 | 435mm |


Non standard sizes available on request ^①

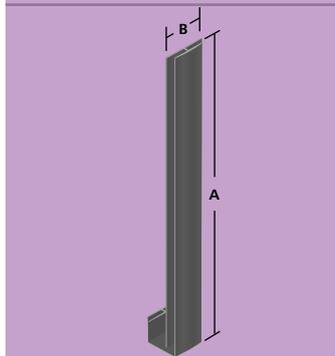

H-Section joint trim

| Code | A | B |
|------|-------|------|
| FC21 | 300mm | 31mm |
| FC22 | 500mm | 31mm |


Site cut as required

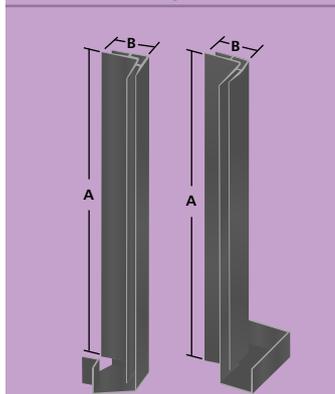

H-section corner joint trim 90°

| Code | | A | B |
|------|----------|-------|------|
| FC61 | External | 300mm | 31mm |
| FC62 | External | 500mm | 31mm |
| FC71 | Internal | 300mm | 31mm |
| FC72 | Internal | 500mm | 31mm |


Site cut as required



Universal angle cover trim

| Code | A | B |
|------|--------|------|
| FC30 | 1000mm | 31mm |

Site cut as required

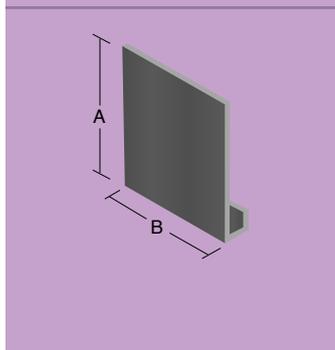


Gable box end

| Code | A | B |
|------|-------|-------|
| FC51 | 350mm | 450mm |
| FC52 | 350mm | 600mm |
| FC53 | 650mm | 600mm |

Site cut as required


Soffit system

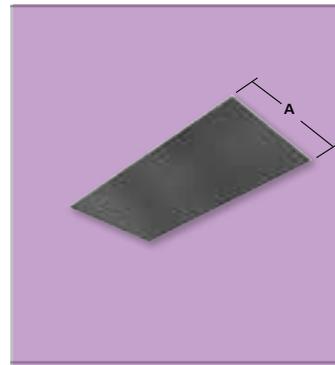

Soffit panel unvented – 3m

| Code | A |
|--------|-------|
| FF1100 | 100mm |
| FF1180 | 180mm |
| FF1240 | 240mm |
| FF1365 | 365mm |
| FF1490 | 490mm |
| FF1740 | 740mm |

Non standard sizes available on request ^①




Soffit panel vented – 3m

| Code | A |
|--------|-------|
| FV1100 | 100mm |
| FV1180 | 180mm |
| FV1240 | 240mm |
| FV1365 | 365mm |
| FV1490 | 490mm |
| FV1740 | 740mm |

Slotted to give 25mm continuous ventilation area

Non standard sizes available on request ^①



H-Section joint trim

| Code | A | B |
|------|--------|------|
| FF21 | 1000mm | 31mm |

Site cut as required



Soffit support trim - 3m

| Code | A | B |
|------|------|------|
| FF30 | 30mm | 25mm |

Installation sundries

Polypin

| Code | Description |
|-------|--|
| SC670 | 2 x 30mm - colour matched 100 per bag |

Poly nail

| Code | Description |
|-------|--|
| SC280 | 3 x 50mm – fixing fascia where gutter will hide fixing - 100 per bag |

Screw fixing

| Code | Description |
|-------|--|
| SC203 | No. 10 x 15mm countersunk – fixing gutter brackets to fascia - 100 per bag |
| SC675 | No. 8 x 25mm flangehead – alternative to polypin fixing - colour matched |


Sealant

| Code | Description |
|-------|-----------------------------------|
| SC103 | Silicone sealant – colour matched |


Invisible bonding system

| Code | Description |
|------|--|
| FY40 | Bonding back plate 3m - For use with Sikatak [®] Panel System Site cut as required Sikatak [®] Panel System - - For use with Bonding back plate 3m. Contact Alutec Technical Services department for further details. |


Top Vented Fascia

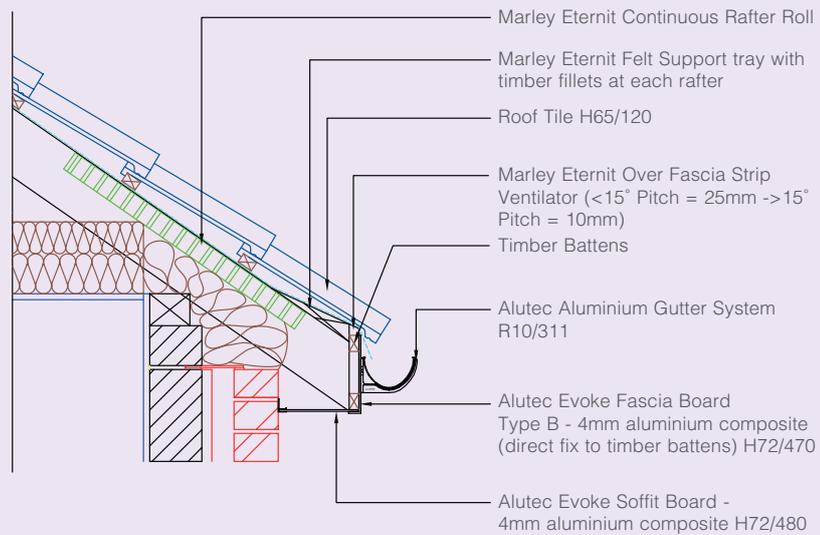


Angled Soffit Panel

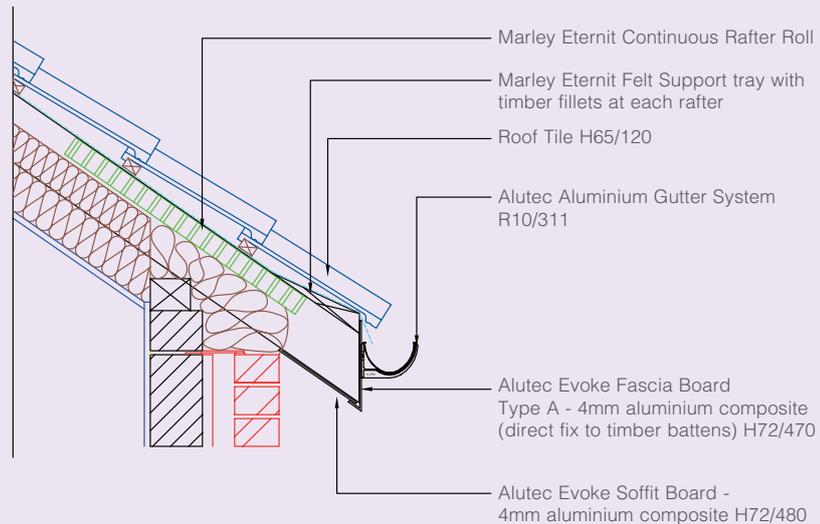

Deep Fascia

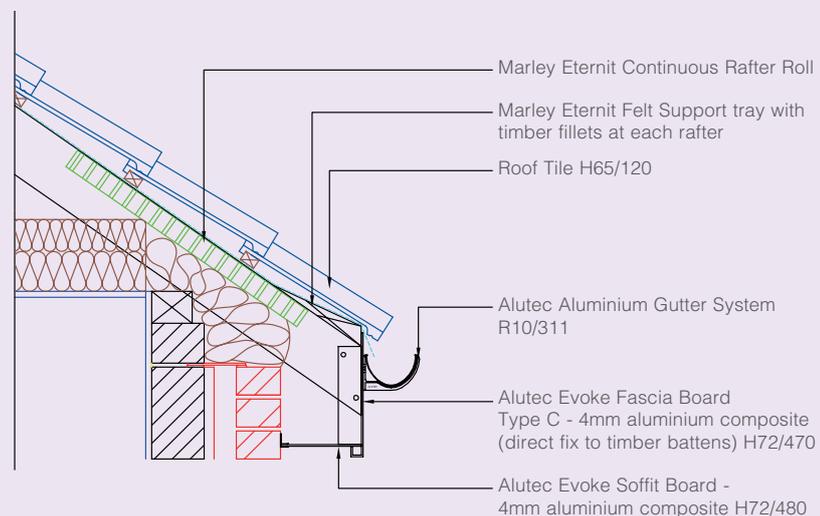

Pitch 15° or less = 25mm Vent
 Pitch 16° or more = 10mm Vent

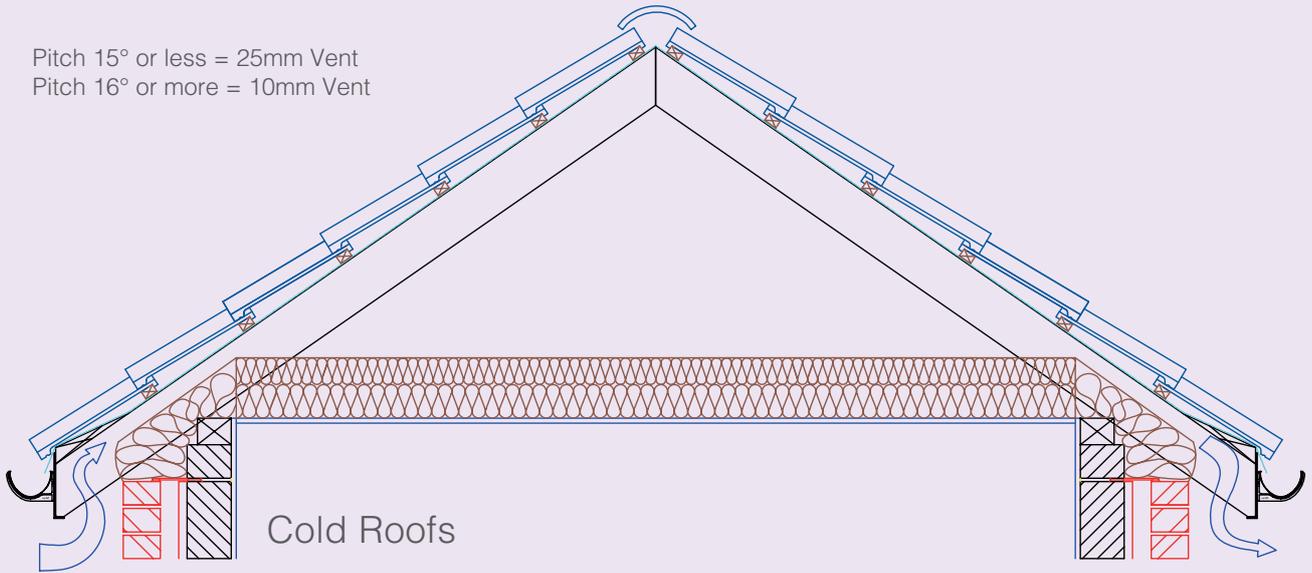


Cold Roofs

Roofs with a large void above the insulation where insulation is at ceiling level and the void is therefore uninhabited and cold.

- 25mm along the length of the eaves for pitches of 15° or less
- 10mm along the length of the eaves for pitches of more than 15°


Insulation at ceiling level = 25mm Vent

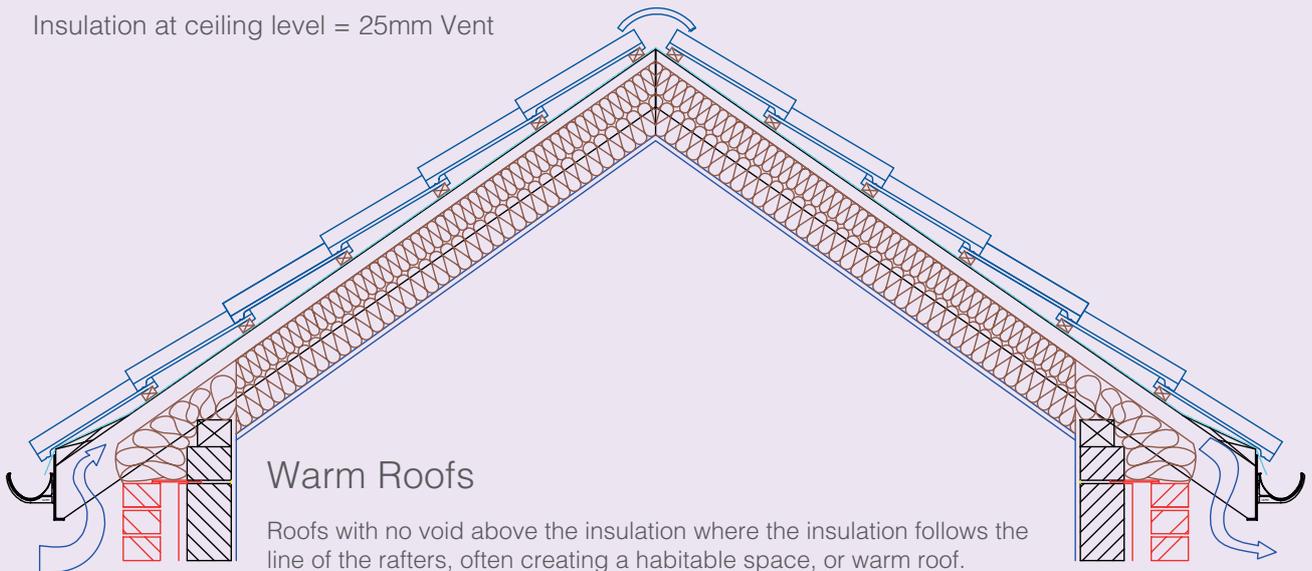

Warm Roofs

Roofs with no void above the insulation where the insulation follows the line of the rafters, often creating a habitable space, or warm roof.

- Low level openings should be equivalent in area to a continuous opening of not less than 25mm along the length of all the eaves

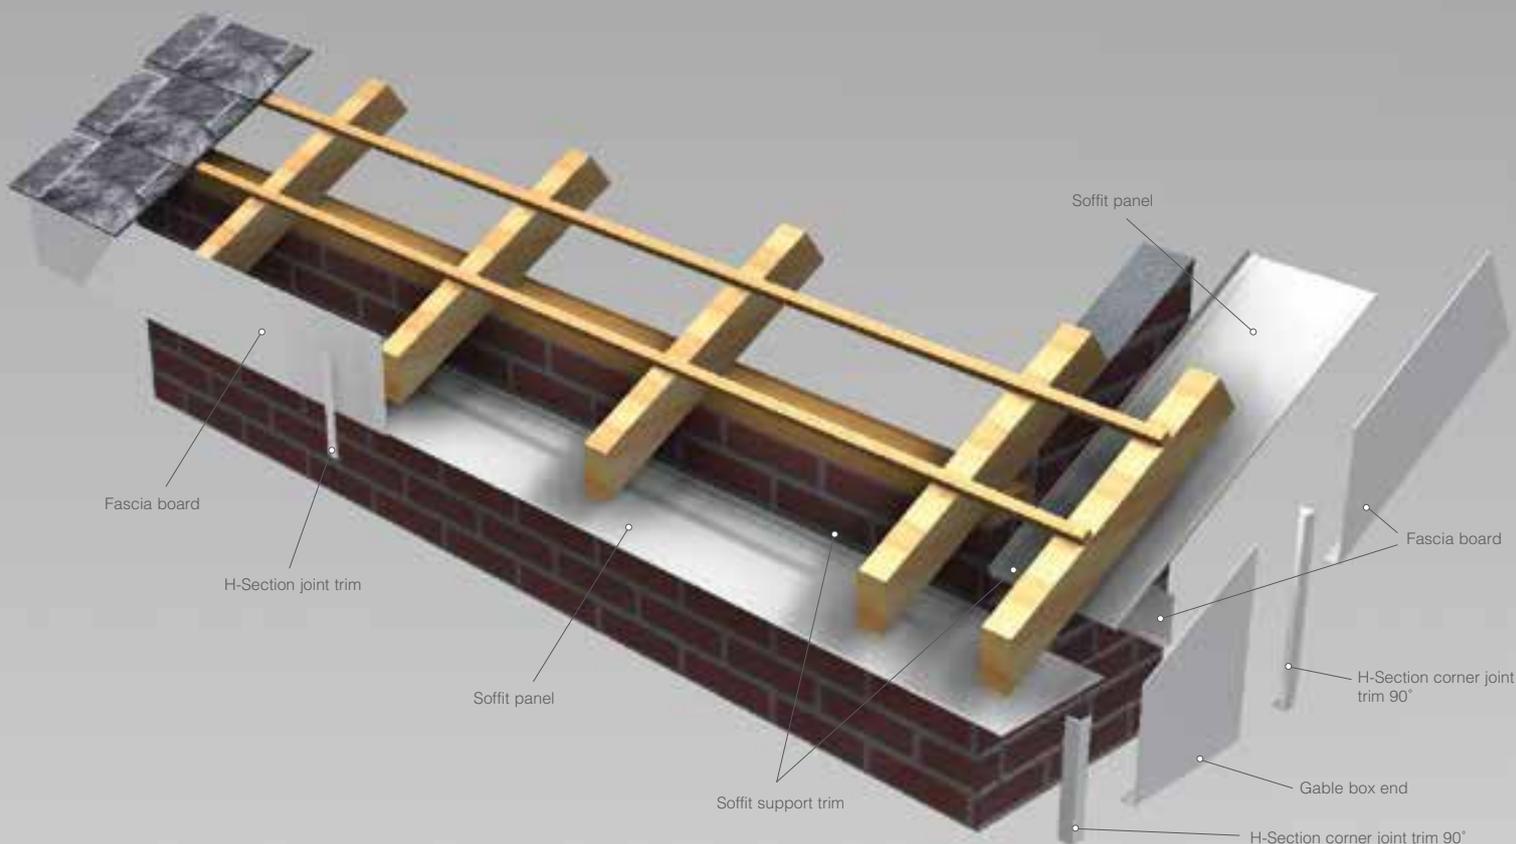

Evoke installation

Full installation instructions are provided with each delivery and can also be downloaded from www.marleyalutec.co.uk



Cutting

Cut, drill and fix using standard wood working tools. De-burr edges after cutting.



Forming & bending

Small pieces can be bent on site by grooving the rear face with a router, then bending the material upwards to the required angle.



For detailed information, refer to the full Evoke installation instructions.

Environmental

Marley Alutec is committed to continually reducing its environmental impact and is accredited to ISO 14001:2004.



Handling & storage

All gutter and pipe lengths are supplied in protective polythene sleeving and components packed in cardboard boxes. If polyester powder coated products are stored outside, cover with tarpaulin to guard against water ingress. If water becomes trapped within the polythene wrapping and left exposed to warm sunlight, it may leave permanent water stains on the paint finish.



evolve RAINWATER SYSTEMS



traditional RAINWATER SYSTEMS



aligator RAINWATER SYSTEMS



evolve FASCIA, SOFFIT & COPING



elite ROOF OUTLET SYSTEMS



For general enquiries, please call **0330 223 1731**
email: sales@guttercentre.co.uk

Unit 21 St Davids Square, Fengate
Peterborough PE1 5QA

Export Division

Telephone: **0330 223 1731**



/marleyalutec

@marleyalutec

/company/marleyalutec

marleyalutec.co.uk