

Product description

The Evoke range of fascia and soffit complements perfectly the long-life expectancy and low maintenance of Marley Alutec aluminium gutter and downpipe systems.

- **Suitable for use up to 18m in height**
- Installs like PVC, no specialist trades required
- Various profiles and sizes available
- Can be fixed directly to roof truss ends
- 12 different PVDF paint colour options that will naturally resist the buildup of dust, grime and algae; keeping maintenance costs to a minimum.

Product Sizes

Code	Depth A (mm)*	Nominal length (m)
FF1100	100	3
FF1180	180	3
FF1240	240	3
FF1365	365	3
FF1490	490	3
FF1740	740	3

* Non standard sizes available on request

Physical properties

Material	4mm thick aluminium composite. Polyethylene thermal break between external surfaces
Finish	Kynar 500 fluorocarbon PVDF paint system

Our standard Fascia and Soffit systems are manufactured from 4mm thick aluminium composite material. These products are suitable for use up to a maximum height of 18m.

For installations carried out above 18 metres in height, and for non-standard colour requirements, our solid sheet aluminium products are available.

Functional Life Expectancy

Marley Alutec aluminium eaves solutions have a functional life-expectancy of 50+ years with minimal maintenance. All products are manufactured using only marine grade aluminium and coated with PVDF external architectural grade paint.

Clause: H72/470
Product: Aluminium composite soffit system
Manufacturer: Marley Alutec, Unit 1 (G-H), Hudson Road, Elms Farm Industrial Estate, Bedford MK41 0LZ.

Product information

Visit www.marleyalutec.co.uk or click on the individual links below.

Technical Services Department

Marley Alutec Technical Services Department has many years' experience in assisting specifiers with all aspects of drainage design and installation.


For advice, contact them on technical@marleyalutec.co.uk, 01234 344108.

Standards

All Marley Alutec systems are manufactured to and in excess of the appropriate BS or EN Standards.

Maintenance

To maximise the life of the decorative paint finishes, all parts should be washed down with clean water at least every 12 months. This period would be shortened to 6 months in a marine/aggressive environment.

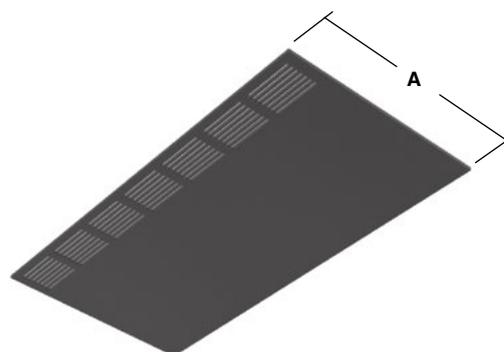

Vented soffit slotted to give 25mm continuous ventilation area

Product description

The Evoke range of fascia and soffit complements perfectly the long-life expectancy and low maintenance of Marley Alutec aluminium gutter and downpipe systems.

- Suitable for use up to 18m in height
- Installs like PVC, no specialist trades required
- Various profiles and sizes available
- Can be fixed directly to roof truss
- 12 different PVDF paint colour options that will naturally resist the buildup of dust, grime and algae; keeping maintenance costs to a minimum.

Product Sizes

Code	Depth A (mm)*	Nominal length (m)
FV1100	100	3
FV1180	180	3
FV1240	240	3
FV1365	365	3
FV1490	490	3
FV1740	740	3

* Non standard sizes available on request

Physical properties

Material	4mm thick aluminium composite. Polyethylene thermal break between external surfaces
Finish	Kynar 500 fluorocarbon PVDF paint system

Our standard Fascia and Soffit systems are manufactured from 4mm thick aluminium composite material. These products are suitable for use up to a maximum height of 18m.

For installations carried out above 18 metres in height, and for non-standard colour requirements, our solid sheet aluminium products are available.

Functional Life Expectancy

Marley Alutec aluminium eaves solutions have a functional life-expectancy of 50+ years with minimal maintenance. All products are manufactured using only marine grade aluminium and coated with PVDF external architectural grade paint.

Clause:	H72/470
Product:	Aluminium composite soffit system
Manufacturer:	Marley Alutec, Unit 1 (G-H), Hudson Road, Elms Farm Industrial Estate, Bedford MK41 0LZ.

Product information

Visit www.marleyalutec.co.uk or click on the individual links below.

Technical Services Department

Marley Alutec Technical Services Department has many years' experience in assisting specifiers with all aspects of drainage design and installation.

For advice, contact them on technical@marleyalutec.co.uk, 01234 344108.

Standards

All Marley Alutec systems are manufactured to and in excess of the appropriate BS or EN Standards.

Maintenance

To maximise the life of the decorative paint finishes, all parts should be washed down with clean water at least every 12 months. This period would be shortened to 6 months in a marine/aggressive environment.

Environmental

Marley Alutec is committed to continually reducing its environmental impact and is accredited to ISO 14001:2015.



Handling & storage

All goods should be stored under cover to protect against ingress of water between surfaces of composite aluminium sheets. Flat panels should be stored fully supported on a flat surface. Profiled lengths should also be fully supported throughout the product length and appropriately stacked to avoid damage to the profile. Ensure that the self-adhesive peel off protective cover is not damaged during handing exposing the painted surface to potential damage.



evolve RAINWATER SYSTEMS



traditional RAINWATER SYSTEMS



aligator RAINWATER SYSTEMS



evolve FASCIA, SOFFIT & COPING



elite ROOF OUTLET SYSTEMS

ALUTEC
ALUMINIUM RAINWATER SYSTEMS

For general enquiries, please call **0330 2231731**

email: sales@guttercentre.co.uk

Unit 21 St Davids Square, Fengate Peterborough PE1 5QA



/marleyalutec

@marleyalutec

/company/marey-alutec

Oalix

www.marleyalutec.co.uk