

ACO EG150 Gully


Product range overview

- 1** Gullies for cementitious/resin screed and tile applications with perforated grating (page 17).
- 3** Gullies for vinyl sheet flooring (page 16).
- 5** Gullies for cementitious/resin screed and tile applications with top for mesh grate (page 19).
- 4** Mesh gratings for cementitious/resin screed and tile applications (page 20).

ACO EG150 Gully - complete




ACO EG150 Gully - 2 part system

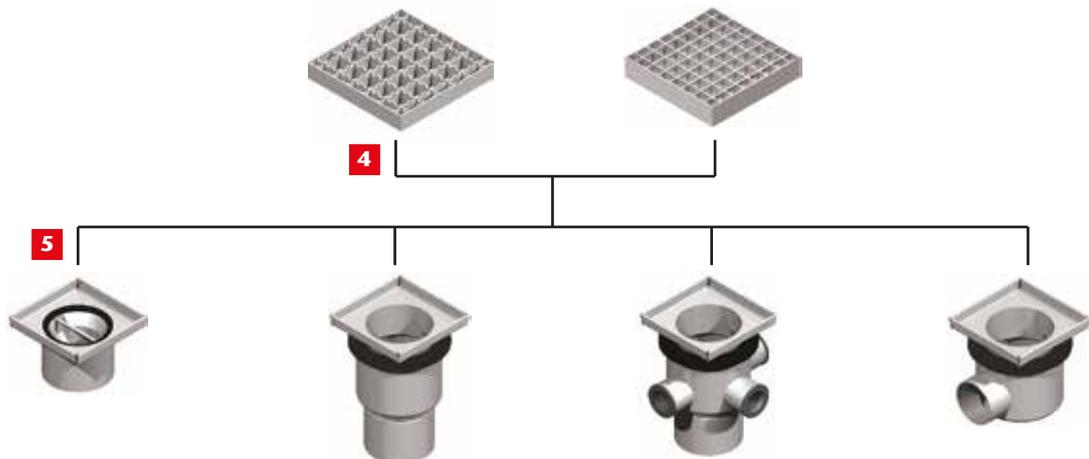




ACO EG150 Gully

Features and benefits




- 1** Perforated grating fitted as standard for pedestrian applications. Load class K3 to BS EN 1253.
- 2** Removable sieve (optional).
- 3** Removable in-line foul air trap fitted as standard, flow rate 1.2 l/s. 50mm water seal meets requirements of BS EN 1253.
- 4** Telescopic height variant providing full 360° rotation and +/- 7.5° pitch and roll adjustment.
- 5** Smooth contour design minimises bacteria traps.
- 6** 3 back inlet variant available supplied with fully interchangeable adaptors to suit 32mm / 1.25" to BS 5254 and 40mm / 1.5" to BS 5255 waste pipes.
- 7** Ø110mm vertical spigot outlet.
- 8** Clamp for vinyl flooring.
- 9** End stops provided to prevent accidental dismantling on telescopic variants.
- 10** Damp proof membrane bonding flanges available for the ultimate in sub-floor security.
- 11** Available with Ø75mm horizontal spigot outlet.
- 12** Shallow gully option, ideal for suspended floor or other restricted depth applications.
- 13** Mesh grating for cementitious / resin screed and tiled applications (2 part system).
- 14** Gullies for cementitious / resin screed and tiled applications.

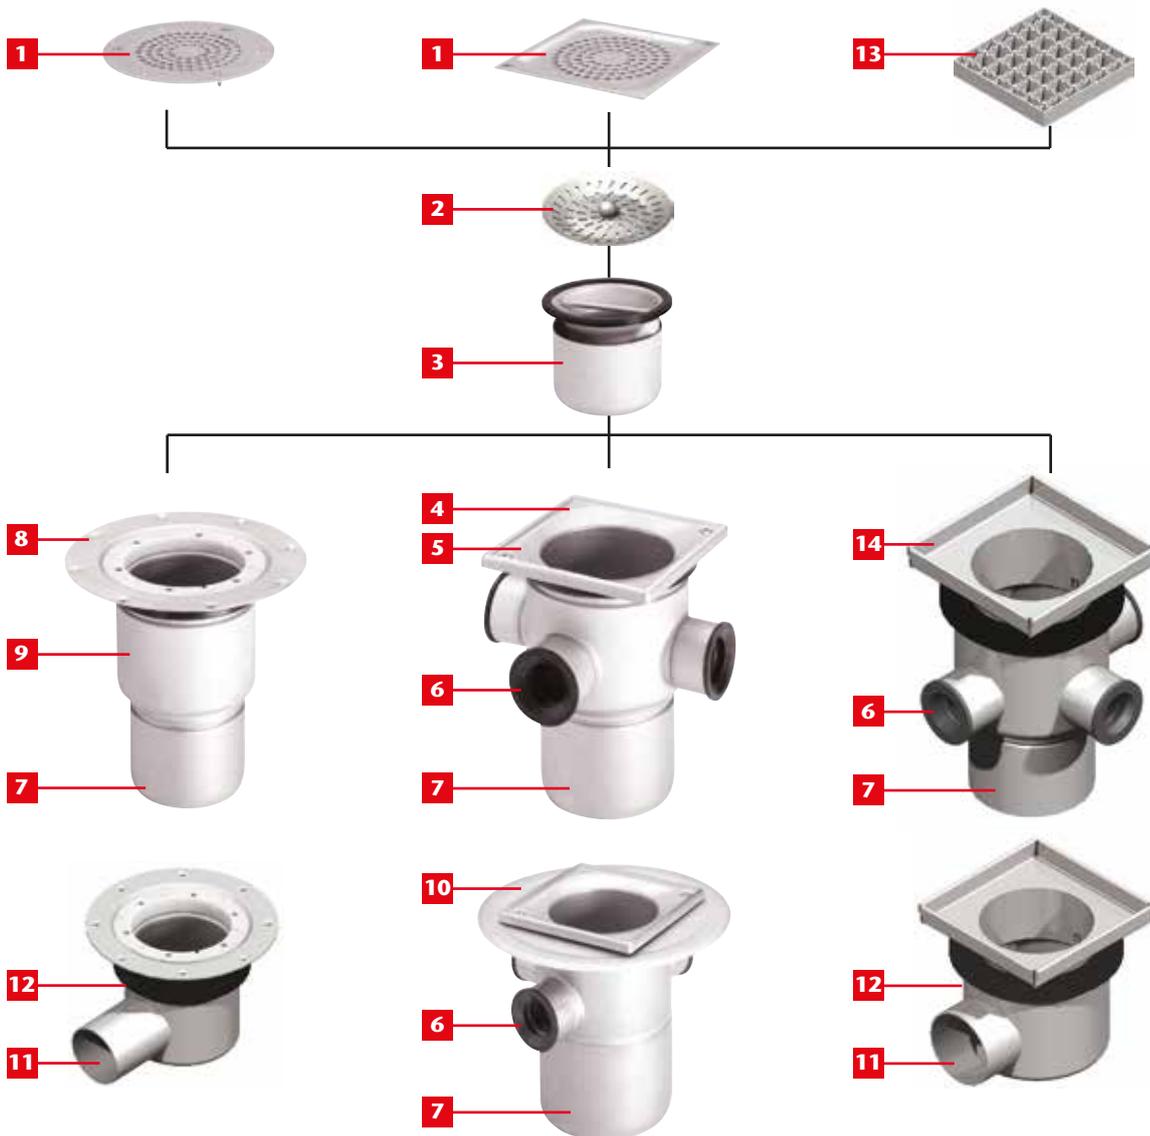



ACO EG150 Gully (for vinyl sheet flooring)






Part No	Description EG150FVL/VNL/110	Load class	Top size (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
97212	EG150 FXD Vertical Outlet Low Level S/S 304	K3	Ø225	112	Ø110	1.2	1.45
97262	EG150 FXD Vertical Outlet Low Level S/S 316	K3	Ø225	112	Ø110	1.2	1.45

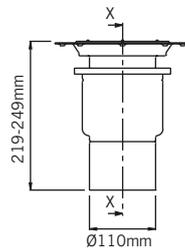

Part No	Description EG150TV/VNL/110	Load class	Top size (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
97207	EG150 TELE Vertical Outlet S/S 304	K3	Ø225	219 - 249	Ø110	1.2	2.30
97257	EG150 TELE Vertical Outlet S/S 316	K3	Ø225	219 - 249	Ø110	1.2	2.30



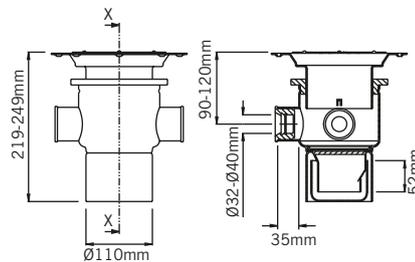


Part No	Description EG150TV3i/VNL/110	Load class	Top size (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
97209	EG150 TELE Vertical Outlet with 3 Inlets S/S 304	K3	Ø225	219 - 249	Ø110	1.2	2.70
97259	EG150 TELE Vertical Outlet with 3 Inlets S/S 316	K3	Ø225	219 - 249	Ø110	1.2	2.70






Part No	Description EG150THL/VNL/75	Load class	Top size (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
97208	EG150 TELE Horizontal Outlet S/S 304	K3	Ø225	126 - 156	Ø75	1.2	2.30
97258	EG150 TELE Horizontal Outlet S/S 316	K3	Ø225	126 - 156	Ø75	1.2	2.30

ACO EG150 Gully (for cementitious/resin screed and tiled floors)






FAT included

Part No	Description EG150FVL/110	Load class	Top size (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
97211	EG150 FXD Vertical Outlet Low Level S/S 304	K3	150×150	105	Ø110	1.2	1.30
97261	EG150 FXD Vertical Outlet Low Level S/S 316	K3	150×150	105	Ø110	1.2	1.30

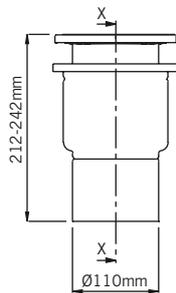

FAT included




Part No	Description EG150TV/110	Load class	Top size (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
97200	EG150 TELE Vertical Outlet S/S 304	K3	150×150	212 - 242	Ø110	1.2	1.70
97250	EG150 TELE Vertical Outlet S/S 316	K3	150×150	212 - 242	Ø110	1.2	1.70

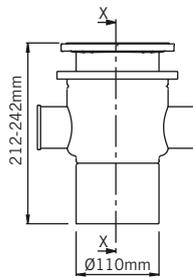

FAT included

Part No	Description EG150TV3i/110	Load class	Top size (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
97202	EG150 TELE Vertical Outlet with 3 Inlets S/S 304	K3	150×150	212 - 242	Ø110	1.2	2.50
97252	EG150 TELE Vertical Outlet with 3 Inlets S/S 316	K3	150×150	212 - 242	Ø110	1.2	2.50


ACO EG150 Gully (for cementitious/resin screed and tiled floors)

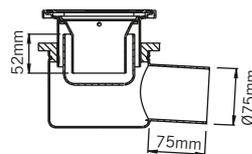


FAT included

Part No	Description EG150THL/75	Load class	Top size (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
97201	EG150 TELE Horizontal Outlet Low Level S/S 304	K3	150×150	120 - 150	Ø75	1.2	2.20
97251	EG150 TELE Horizontal Outlet Low Level S/S 316	K3	150×150	120 - 150	Ø75	1.2	2.20

ACO EG150 Gully (for damp proof membrane bonding)

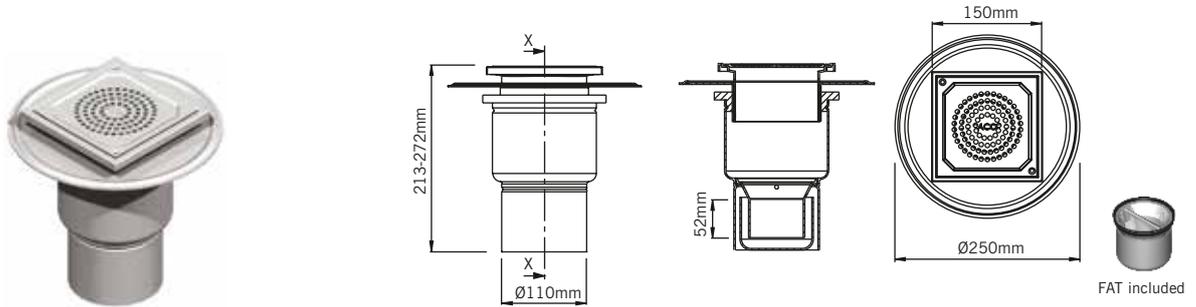




Part No	Description EG150TVB/110	Load class	Top size (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
97216	EG150 TELE Vertical Outlet with Bonding Flange S/S 304	K3	150×150	213 - 272	Ø110	1.2	2.60
97266	EG150 TELE Vertical Outlet with Bonding Flange S/S 316	K3	150×150	213 - 272	Ø110	1.2	2.60

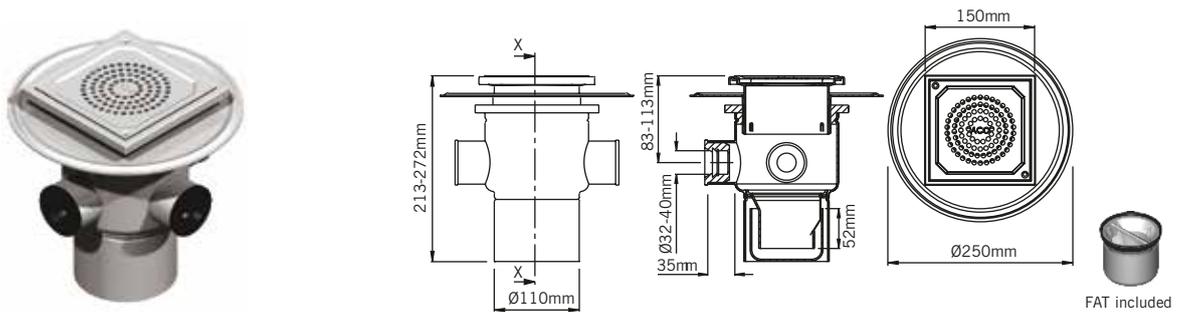

Part No	Description EG150TVB3/110	Load class	Top size (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
97205	EG150 TELE Vertical Outlet with Bonding Flange and 3 Inlets S/S 304	K3	150×150	213 - 272	Ø110	1.2	2.95
97255	EG150 TELE Vertical Outlet with Bonding Flange and 3 Inlets S/S 316	K3	150×150	213 - 272	Ø110	1.2	2.95






ACO EG150 Gully, 2 Part System (for cementitious/resin screed and tiled floors with top for mesh grate)






FAT included

Part No	Description EG150FVLM/110	Load class	Top size (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
400834	EG150 FXD Vertical Outlet Low Level S/S 304 (Gully only)	K3	150x150	119	Ø110	1.2	1.00
400835	EG150 FXD Vertical Outlet Low Level S/S 316 (Gully only)	K3	150x150	119	Ø110	1.2	1.00

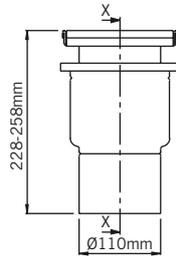




FAT included

Part No	Description EG150TVM/110	Load class	Top size (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
97296	EG150 TELE Vertical Outlet S/S 304 (Gully only)	K3	150x150	228 - 258	Ø110	1.2	1.85
97298	EG150 TELE Vertical Outlet S/S 316 (Gully only)	K3	150x150	228 - 258	Ø110	1.2	1.85

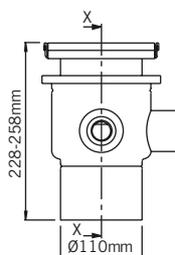

FAT included

Part No	Description EG150TVM3i/110	Load class	Top size (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
97312	EG150 TELE Vertical Outlet with 3 Inlets S/S 304 (Gully only)	K3	150x150	228 - 258	Ø110	1.2	2.20
97314	EG150 TELE Vertical Outlet with 3 Inlets S/S 316 (Gully only)	K3	150x150	228 - 258	Ø110	1.2	2.20




FAT included


Part No	Description EG150THLM/75	Load class	Top size (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
97308	EG150 TELE Horizontal Outlet S/S 304 (Gully only)	K3	155x155	136 - 166	Ø75	1.2	1.85
97310	EG150 TELE Horizontal Outlet S/S 316 (Gully only)	K3	155x155	136 - 166	Ø75	1.2	1.85

Contact the Gutter Centre Team on 0330 223 1731 or email sales@guttercentre.co.uk for further details.

ACO EG150 Gully Gratings for 2 Part Gully System

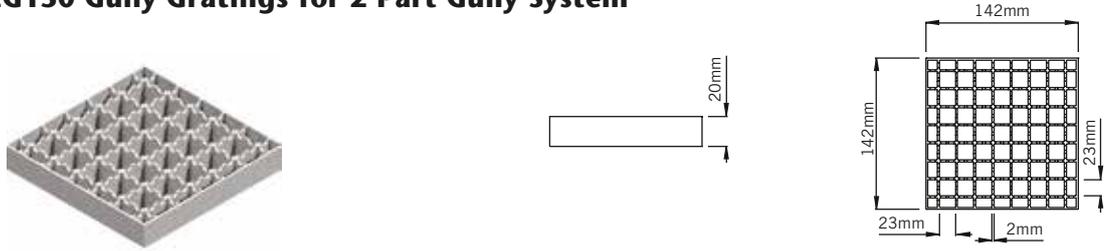


Part No	Description EG150SR	Finish	Load class	Length overall (mm)	Width overall (mm)	Depth overall (mm)	Weight (kg)
05964	Slip Resistant Mesh S/S 304	Electro Polished	K3	142	142	20	0.54
15964	Slip Resistant Mesh S/S 316	Electro Polished	K3	142	142	20	0.54

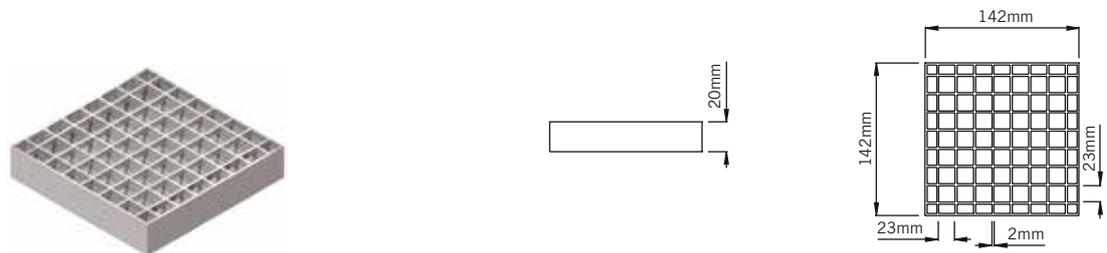


Part No	Description EG150PL	Finish	Load class	Length overall (mm)	Width overall (mm)	Depth overall (mm)	Weight (kg)
05965	Plain Mesh S/S 304	Electro Polished	K3	142	142	20	0.58
15965	Plain Mesh S/S 316	Electro Polished	K3	142	142	20	0.58

ACO EG150 Accessories and Replacement Parts

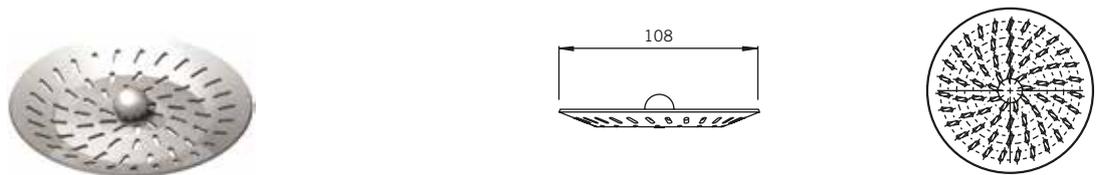

Part No	Description	Length overall (mm)	Width overall (mm)	Depth overall (mm)	Flow rate (l/s)	Weight (kg)
97235	Sieve S/S 304	-	Ø104.5	5.0	-	0.10
97285	Sieve S/S 316	-	Ø104.5	5.0	-	0.10

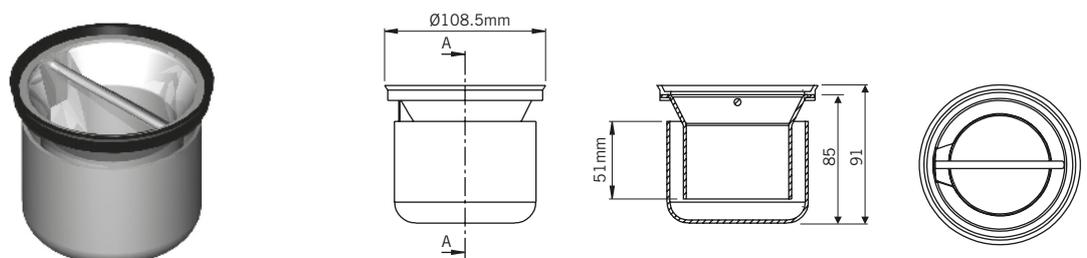

Part No	Description	Length overall (mm)	Width overall (mm)	Depth overall (mm)	Flow rate (l/s)	Weight (kg)
97217	Foul Air Trap 110mm Outlet S/S 304	-	Ø108.5	91.0	1.2	0.30
97267	Foul Air Trap 110mm Outlet S/S 316	-	Ø108.5	91.0	1.2	0.30


Contact the Gutter Centre Team on 0330 223 1731 or email sales@guttercentre.co.uk for further details.

ACO Condensate Gully

NEW!

Features and benefits


- Ideal for the collection of condensate discharge.
- Fully removable and easily cleaned stainless steel foul air trap (FAT).
- 304 stainless steel gully fully compliant to BS EN 1253.
- Compact gully body with horizontal 50mm spigot outlet.
- Complete with membrane clamp.
- Available in 316 stainless steel to special order.
- 1.2 l/s flow rate.
- Combined tundish/Ladder grating options.

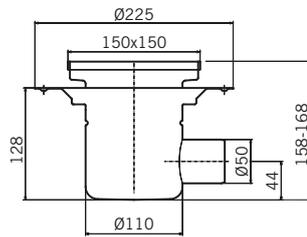


FAT included

Part No	Description	Top size (mm)	Body dia (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
416417	Condensate Gully TELE Horizontal Outlet S/S 304	150 x 150	110	158 - 168	50	1.2	1.90

Note: For optional sieve and replacement foul air trap please refer to page 20.



Part No	Description	Finish	Top Size (mm)	Entry Dia (mm)	Tundish Height (mm)	Weight (kg)
416418	Ladder Grate and 150mm Dia Mounted Tundish S/S 304	Pickled	142 x 142	150	150	1.60

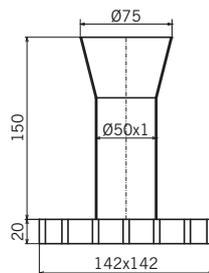

Part No	Description	Finish	Top Size (mm)	Entry Dia (mm)	Tundish Height (mm)	Weight (kg)
416570	Ladder Grate and 75mm Dia Mounted Tundish S/S 304	Pickled	142 x 142	75	150	1.60

Contact the Gutter Centre Team on 0330 223 1731 or email sales@guttercentre.co.uk for further details.

