


ACO Gully 357


Features and benefits

- One-piece gullies, designed to be used in commercial applications suitable for concrete, resin or tiled floors.
- Manufactured from 2mm and 3mm thick austenitic stainless steel grade 304 or 316 to BS EN 10088.
- Pickle passivated to ensure corrosion free joints.
- Optional silt basket collects debris.
- Supplied complete with removable foul air trap to allow rodding access to connecting pipework for easy cleaning and maintenance.
- Height adjustable levelling feet allow for quick and easy installation.
- Bowl shaped gully bodies deter silt and debris collecting in corners making cleaning easy.
- Available with either Ø160mm and Ø200mm spigot outlets.
- Electrical earthing point provided as standard.
- Chamfered spigot outlets allow easy push fit connection onto existing drainage pipes.

- 1** Gratings
- 2** Silt baskets
- 3** Foul air traps
- 4** Gully bodies

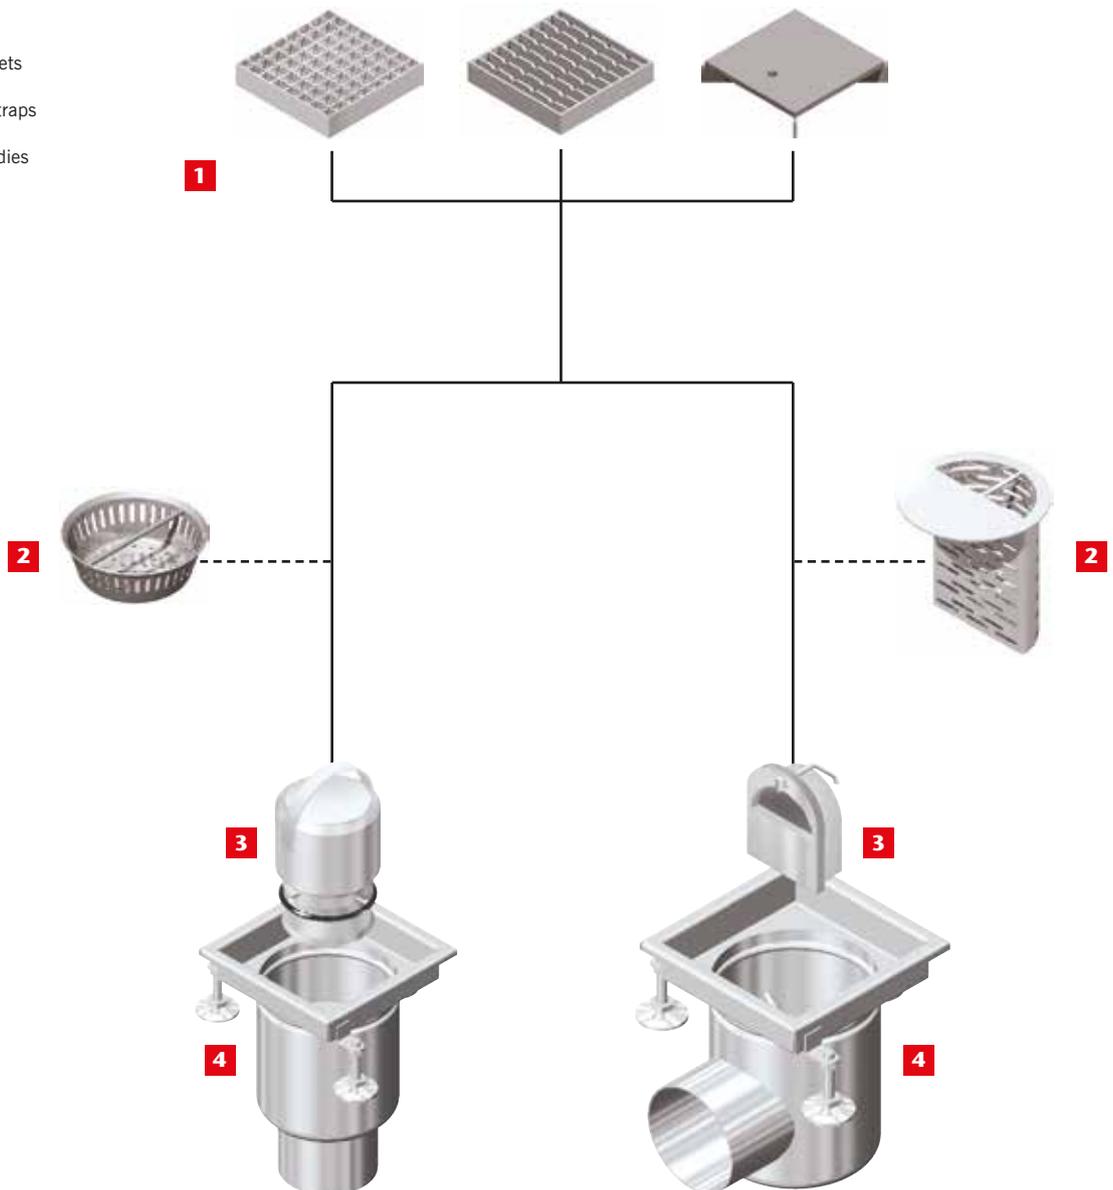


ACO Gully 357 – Fixed Height



FAT included

Part No	Description	Top size (mm)	Body dia (mm)	Depth † overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
05766	Gully 357 FXD Vertical Outlet S/S 304	400×400	357	336 (+80)	Ø160	10.0	12.00
15766	Gully 357 FXD Vertical Outlet S/S 316	400×400	357	336 (+80)	Ø160	10.0	12.00



†Spigot depth in brackets.



FAT included



Part No	Description	Top size (mm)	Body dia (mm)	Depth † overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
05768	Gully 357 FXD Vertical Outlet S/S 304	400×400	357	336 (+80)	Ø200	11.0	12.30
15768	Gully 357 FXD Vertical Outlet S/S 316	400×400	357	336 (+80)	Ø200	11.0	12.30

†Spigot depth in brackets.



Horizontal FAT included

Part No	Description	Top size (mm)	Body dia (mm)	Depth* overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
05767	Gully 357 FXD Horizontal Outlet S/S 304	400×400	357	346	Ø160	8.5	12.10
15767	Gully 357 FXD Horizontal Outlet S/S 316	400×400	357	346	Ø160	8.5	12.10




Horizontal FAT included


Part No	Description	Top size (mm)	Body dia (mm)	Depth* overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
05769	Gully 357 FXD Horizontal Outlet S/S 304	400×400	357	346	Ø200	9.5	12.10
15769	Gully 357 FXD Horizontal Outlet S/S 316	400×400	357	346	Ø200	9.5	12.10

Contact the Gutter Centre Team on 0330 223 1731 or email sales@guttercentre.co.uk for further details.


ACO Gully 357 – Fixed Height – Accessories and Replacement Parts

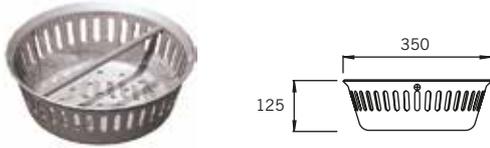


Part No	Description	Length overall (mm)	Width overall (mm)	Depth overall (mm)	Flow rate (l/s)	Weight (kg)
05790	Vertical Outlet Gully Silt Basket 9.5 litres capacity S/S 304	-	Ø350	125	-	1.76
15790	Vertical Outlet Gully Silt Basket 9.5 litres capacity S/S 316	-	Ø350	125	-	1.76

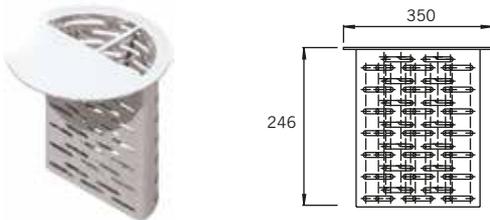

Part No	Description	Length overall (mm)	Width overall (mm)	Depth overall (mm)	Flow rate (l/s)	Weight (kg)
05791	Horizontal Outlet Gully Silt Basket 9.5 litres capacity S/S 304	-	Ø350	246	-	2.69
15791	Horizontal Outlet Gully Silt Basket 9.5 litres capacity S/S 316	-	Ø350	246	-	2.69

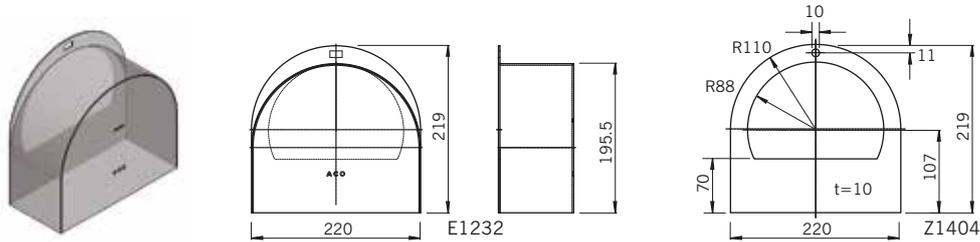

Part No	Description	Length overall (mm)	Width overall (mm)	Depth overall (mm)	Flow rate (l/s)	Weight (kg)
E1232	Horizontal Foul Air Trap S/S 304	219	220	98	8.5/9.5	1.77
Z1404	Foul Air Trap Seal	220	220	10	-	0.05

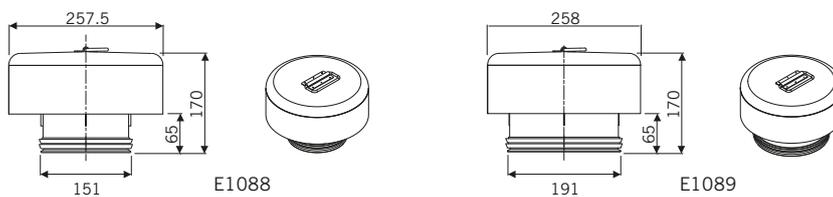


Part No	Description	Length overall (mm)	Width overall (mm)	Depth overall (mm)	Flow rate (l/s)	Weight (kg)
E1088	Foul Air Trap S/S 304 (for 160mm Spigot Diameter)	-	Ø258	170	-	2.60
E1089	Foul Air Trap S/S 304 (for 200mm Spigot Diameter)	-	Ø258	170	-	2.80




Part No	Description	Length overall (mm)	Width overall (mm)	Depth overall (mm)	Flow rate (l/s)	Weight (kg)
E1578	Foul Air Trap Seal for E1088	-	Ø137	18	-	0.10
E1579	Foul Air Trap Seal for E1089	-	Ø177	18	-	0.10

ACO Gully 357 – Gratings for Top Size 400 x 400mm (40mm Deep)

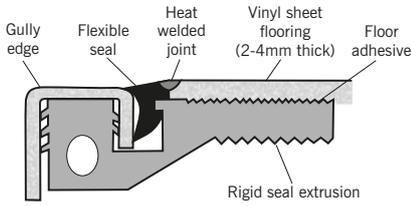


Ideal for vinyl/flexible sheet flooring applications, ACO Vinyl Seal® can be used to create a fully welded system that is watertight and improves hygiene performance by eliminating cumbersome mechanical clamping systems. **ACO Vinyl Seal® is not suitable for wooden or suspended floors.**


Part No	Description	Length overall (mm)	Weight (kg)
49454	Gully 357 Vinyl Seal® Kit (includes Flexible PVC Seal and Rigid PVC Extrusion)	0.60	26.85

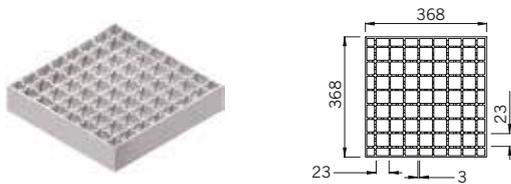

Part No	Description	Finish	Load class	Length overall (mm)	Width overall (mm)	Depth overall (mm)	Weight (kg)
05927	Plain Mesh S/S 304	Electropolished	C250	368	368	40	7.20
15927	Plain Mesh S/S 316	Electropolished	C250	368	368	40	7.20
05926	Slip Resistant Mesh S/S 304	Electropolished	C250	368	368	40	7.20
15926	Slip Resistant Mesh S/S 316	Electropolished	C250	368	368	40	7.20

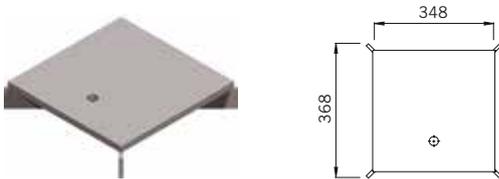

Part No	Description	Finish	Load class	Length overall (mm)	Width overall (mm)	Depth overall (mm)	Weight (kg)
05943	Slot Cover S/S 304	Pickled	C250	368	368	40	11.10
15943	Slot Cover S/S 316	Pickled	C250	368	368	40	11.10

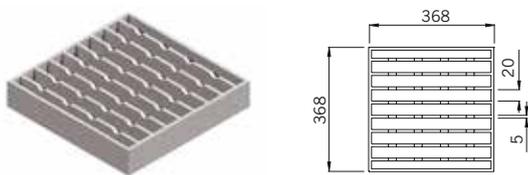

Part No	Description	Finish	Load class	Length overall (mm)	Width overall (mm)	Depth overall (mm)	Weight (kg)
401694	Ladder S/S 304 (Reversible Plain or Slip Resistant)	Pickled	C250	368	368	40	11.50
401698	Ladder S/S 316 (Reversible Plain or Slip Resistant)	Pickled	C250	368	368	40	11.50

Please refer to page 24 for gully locking kits and appropriate wrench to complete locked grating system.

Contact the Gutter Centre Team on 0330 223 1731 or email sales@guttercentre.co.uk for further details.