

## ACO Micro Floor Gullies


### Features and benefits

The Micro Floor Gully is a light duty, compact trapped drain manufactured from Grade 304 stainless steel. Designed to provide discrete drainage for washrooms, toilet areas and plant rooms. An invert depth of just 76mm makes it ideal for use in areas where depth is restricted or for refurbishment work where excavation can be kept at a minimum.


- 1** The gully is supplied with a circular grating located in a 100mm square top. Optional lockable grating is also available.
- 2** The foul air trap is an integral part of the grating and allows full rodding access to the drainage pipework and eradicates the need for additional rodding eyes.
- 3** Suitable for use with cementitious/resin screed and tile applications.
- 4** Complete with fixing tangs with earth wire connections.
- 5** 50mm water seal depth meets requirements of BS EN 1253.
- 6** Compact unit 133mm overall depth.
- 7** Vertical Ø40mm spigot outlet allowing easy connection to existing pipework with either push fit or compression fittings.



### ACO Micro Floor Gullies

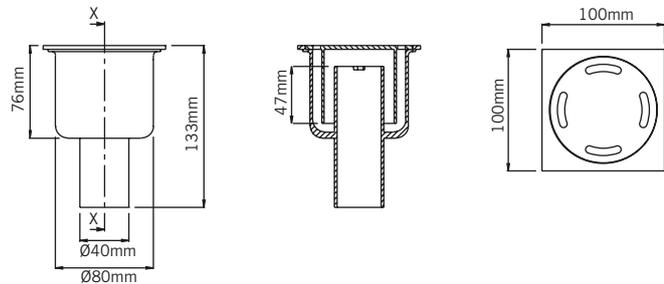

Part No	Description MG100FSV/40	Load class	Top size (mm)	Body dia (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
04156	Micro Floor Gully FXD Vertical Outlet non-locked S/S 304	K3	100×100	Ø80	133	Ø40	0.24	0.35

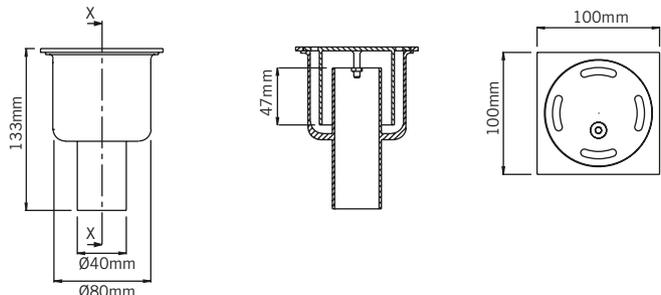

Part No	Description MGL100FSV/40	Load class	Top size (mm)	Body dia (mm)	Depth overall (mm)	Spigot dia (mm)	Flow rate (l/s)	Weight (kg)
04157	Micro Floor Gully FXD Vertical Outlet locked S/S 304	K3	100×100	Ø80	133	Ø40	0.24	0.35

Contact the ACO Building Drainage Team on 01462 810400 or email [abdtechnical@aco.co.uk](mailto:abdtechnical@aco.co.uk) for further details.