

Drainage Outlets

*110mm vertical and horizontal outlets,
manufactured in grade 304 stainless steel
with complimentary grating offer*




Drainage Outlets

Part of the Harmer Modular 135 stainless steel range are a complementary offer of compact floor gully outlets, available in vertical and horizontal configurations with grating options to match that of the channel system.

The innovative floor gully system allows for fine height adjustment via the 4" NPSM threaded bezels that adjust to the desired finished floor height, all the below bezels and gratings come as standard with a removable foul air trap. Gully bodies have integral clamping collars, for use with waterproof membranes.


Vertical Spigot Outlet - Deep Sump

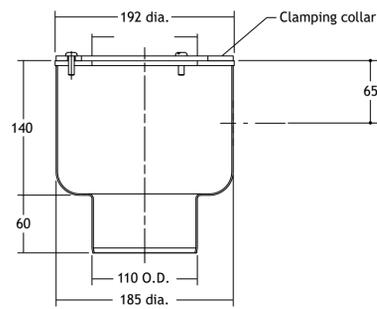

Outlet Size (mm)	Connection	Weight (kg)	Product Code
110	Spigot	2.7	SDVS100

- Female 4" NPSM threaded connection to accept grating
- 110mm (4") diameter spigot for connecting onto pipework
- Deep sump to maximise available flow rate
- Grade 304 stainless steel

Horizontal Spigot Outlet - Deep Sump

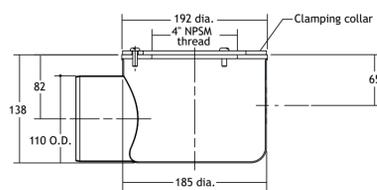

Outlet Size (mm)	Connection	Weight (kg)	Product Code
110	Spigot	2.7	SDHS100


- Female 4" NPSM threaded connection to accept grating
- 110mm (4") diameter spigot for connecting onto pipework
- Deep sump to maximise available flow rate
- Grade 304 stainless steel



Adjustable Height Grating Options

The Harmer stainless steel grating range is manufactured from grade 304. Connection is made onto any NPSM threaded cast iron or stainless steel body which allows for fine threaded height adjustment of the grating to suit a wide range of applications.


Anti-Slip Mesh Grating Assembly

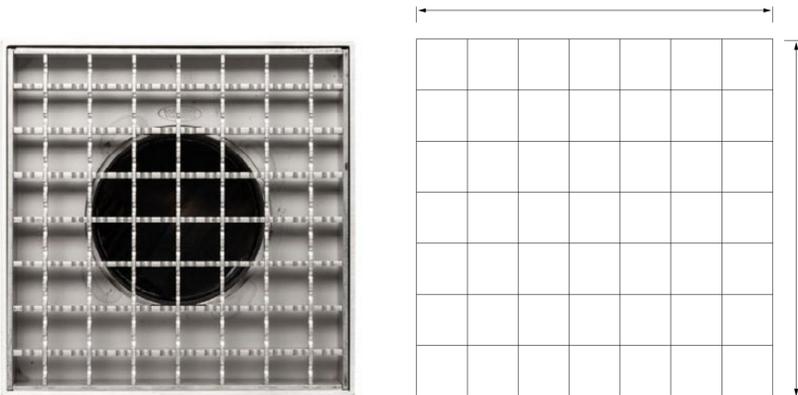

Frame Size (mm)	Grating Size (mm)	Aperture (mm)	Load Rating	Product Code
200x200	195x195	20	A15	AS20/SS/4/T

- Load Class: A15
- Ideally suited for use in kitchen and food preparation areas
- Available in 195mm x 195mm grating
- NOT barefoot safe


Circular Perforated Grating Assembly

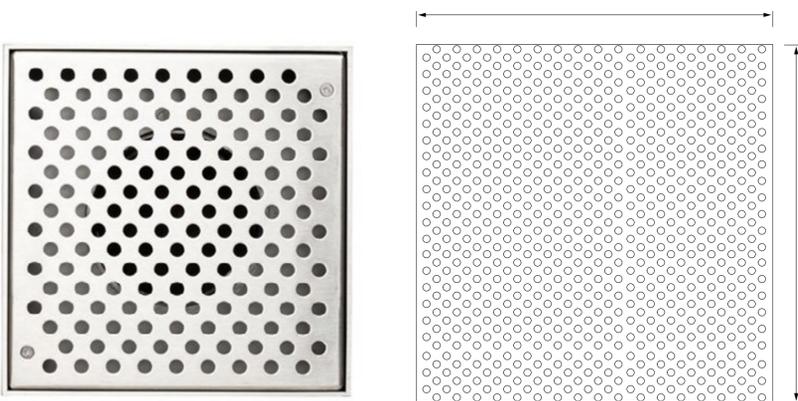

Frame Size (mm)	Grating Size (mm)	Aperture (mm)	Load Rating	Product Code
200x200	195x195	10	A15	PC20/SS/4/T

- Load Class: A15
- Ideally suited for changing areas and domestic showers
- Available in 195mm x 195mm grating
- Barefoot safe

Heel Proof Grating Assembly

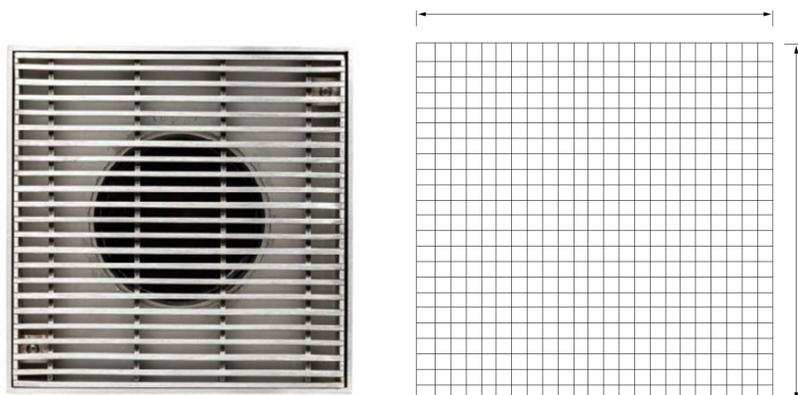

Frame Size (mm)	Grating Size (mm)	Aperture (mm)	Load Rating	Product Code
200x200	195x195	5	A15	HP20/SS/4/T

- Load Class: A15
- Ideally suited for use in public realm, changing areas, domestic showers etc.
- Available in 195mm x 195mm grating
- Barefoot safe