



SitaSani® 63/90/105



SitaSani® 70




SitaSani® 95

Properties

The SitaSani® problem solver with a long spigot and sealing ring. This compensates for the existing waterproofing and insulation layers to the rainwater outlet or fall pipe in place. Multi-compatible for almost any make of rainwater outlet, the rainwater outlets of this series can solve almost any refurbishment task. The various sealing rings are used to match the existing internal diameters. The integrated and additionally fixed selected connection sleeve offers a homogeneous connection to the roof seal.

- + Backflow safe up to a water column of 2 metres
- + To refurbish rainwater outlets and for refurbishment down into the fall pipe
- + With selected connection sleeve
- + Can be installed and sealed very quickly


Installation example

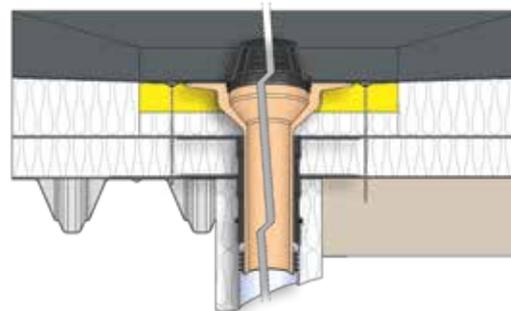

Quality marks

SitaSani®	Backflow safe for internal diameters from-to (mm)	Spigot length (mm)	Article number
 63/90/105	68-86	550	10 63 xx
	98-107	550	10 32 xx
	105-134	550	10 33 xx
 70	82-103	255	10 36 xx
 95	100-140	250	10 28 xx
	100-140	500	10 38 xx





SitaSani® 115



SitaSani® 125




SitaSani® 165

Properties

The SitaSani® problem solver with a long spigot and sealing ring. This compensates for the existing waterproofing and insulation layers to the rainwater outlet or fall pipe in place. Multi-compatible for almost any make of rainwater outlet, the rainwater outlets of this series can solve almost any refurbishment task. The various sealing rings are used to match the existing internal diameters. The integrated and additionally fixed selected connection sleeve offers a homogeneous connection to the roof seal.

- + Backflow safe
- + To refurbish rainwater outlets and for refurbishment down into the fall pipe
- + With selected connection sleeve
- + Can be installed and sealed very quickly

Installation example

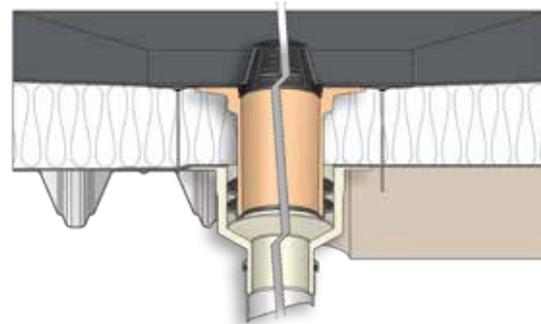

Quality marks



SitaSani®	Backflow safe for internal diameters from-to (mm)	Spigot length (mm)	Article number
 115	115-130	255	10 35 xx
 125	134-168	250	10 27 xx
	134-168	550	10 37 xx
 165	165-205	200	10 29 xx
	165-205	550	10 40 xx

SitaSani® screw-on flange



SitaSani® 63/90
screw-on flange



SitaSani® 70
screw-on flange




SitaSani® 165
screw-on flange

Properties

The SitaSani® screw-on flange problem solver with a long spigot and sealing ring. This compensates for the existing waterproofing and insulation layers to the rainwater outlet or fall pipe in place. Multi-compatible for almost any make of rainwater outlet, the rainwater outlets of this series can solve almost any refurbishment task. The various sealing rings are used to match the existing internal diameters.

- + Backflow safe
- + To refurbish rainwater outlets and for refurbishment down into the fall pipe
- + With loose-fixed flange construction
- + Can be installed and sealed very quickly

Installation example

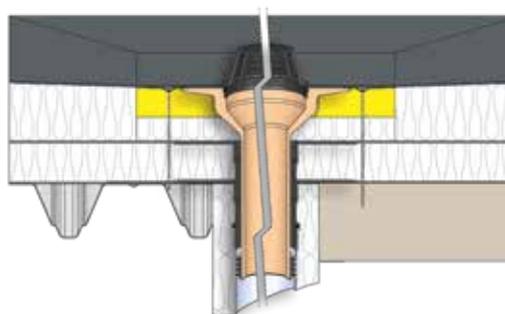

Quality marks

SitaSani® screw-on flange	Backflow safe for internal diameters from-to (mm)	Spigot length (mm)	Article number
 63/90/105	68 - 86	550	10 63 99
	98 - 107	550	10 32 99
	105 - 134	550	10 33 99
 70	82 - 103	255	10 36 99
 165	165 - 205	550	10 40 99



SitaSani® 160 DSS



SitaSani® 160 DSS



SitaSani® 160 DSS
screw-on flange


Properties

For the refurbishment of siphonic drainage rainwater outlets in place with a pot diameter of 160 mm, the **SitaSani® 160 DSS** can easily bridge the thermal insulation. The relevant **Airstop** prevents the unwanted ingress of air, thus ensuring that the pipe system in place is completely filled. The integrated and fixed selected connection sleeve delivers a homogeneous connection to the roof seal. The SitaSani® DSS 160 is also available in a screw-on flange version.

- + For siphonic drainage rainwater outlets in place with a pot diameter of 160 mm
- + With Airstop for siphonic drainage
- + With either with loose-fixed flange design or selected connection sleeve
- + Can be installed and sealed very quickly

SitaSani® 160 DSS	Spigot length (mm)	Article number
	200	10 60 xx
	550	10 61 xx
 Screw-on flange	550	10 61 99

Installation example

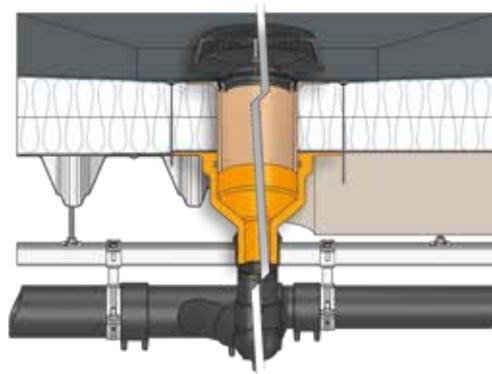

Quality mark



SitaVent refurbishment vent




Properties

The **SitaVent refurbishment vent** secures the transition into the old vent pipe to be refurbished. It is supplied as a set, containing all the required components. These include the base plate with selected connection sleeve, the rejector and the refurbishment vent pipe with an adapter to the pipe being refurbished and matching multiple-lip EPDM rubber seal. A new warm roof structure can be completed with an additional base plate.


- + For room and section ventilation
- + With integrated selected connection sleeve
- + Connection to all functional layers
- + For pipe diameters up to 205 mm

Installation example

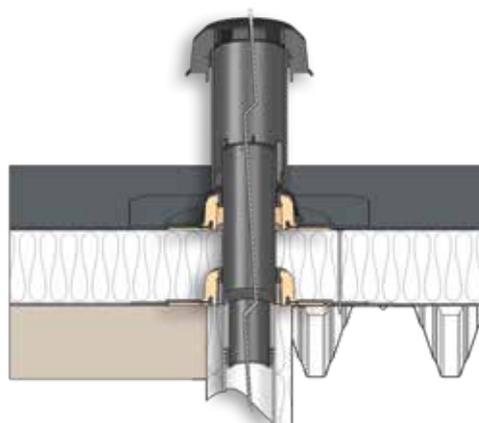

SitaVent refurbishment vent	OD*	Backflow safe from (mm)	Base plate DN	Article number
	63	68-86	100	17 30 xx
	75	82-103	100	17 31 xx
	90	98-107	100	17 32 xx
	110	115-130	100	17 33 xx
	125	140-168	150	17 34 xx
	160	178-205	150	17 35 xx

SitaVent refurbishment vent

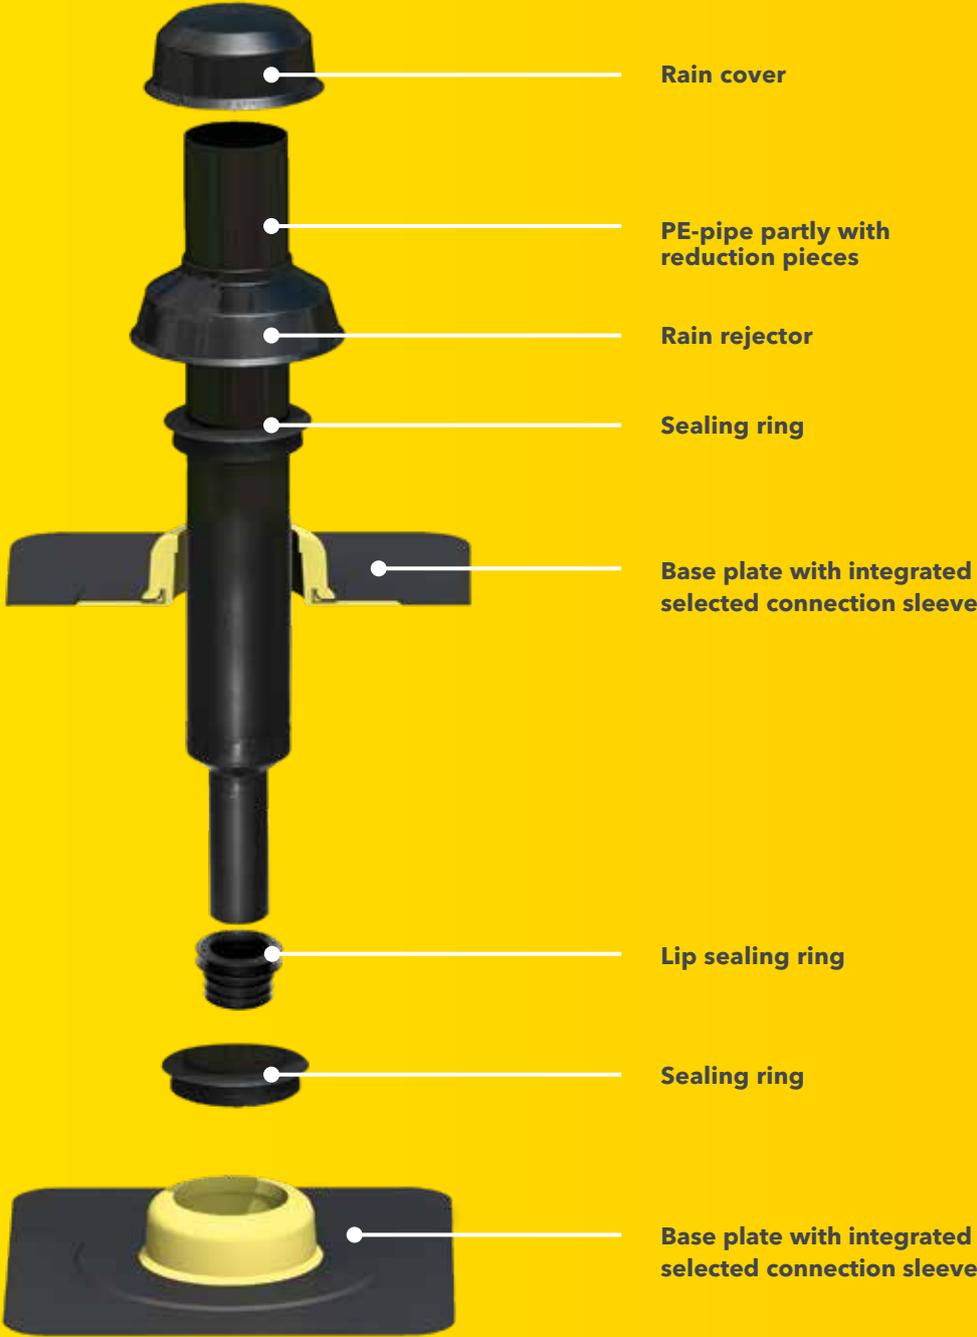

This is how easy combinations are generated.

Accessories	Product series									
	SitaSani® 63/90/105	SitaSani® 70	SitaSani® 95	SitaSani® 115	SitaSani® 125	SitaSani® 165	SitaSani® screw-on flange 63/90/105	70	165	SitaVent refurbish- ment vent
SitaMore terrace kit										
SitaTrendy extension uni										
SitaCompact terrace kit										
SitaCompact extension unit										
SitaCompact flat grate										
SitaSani® insulating body										
SitaVent base plate										
SitaVent rain cover										
SitaVent pipe system protective grating										
SitaVent pipe bend										
SitaVent vapour barrier cap										
SitaVent condensation deflector										